

## 浙江超信机械科技有限公司

Zhejiang Chaoxin Machinery Technology Co., Ltd.

地址：浙江省温州市平阳县万全工业区兴隆路118号

国内总业务热线：13706889719

华南地区：13758833636

华北地区：13695837878 华中地区：13676537676

西南地区：13868503439 西北地区：13867736682

邮箱：cxmachinery@zjchaoxin.com

Add: NO.118 XingLong Road, Wanquan Industrial Zone,

Pingyang, Wenzhou, Zhejiang, P.R.,CHINA

Mob: +86-13958915221

E-mail: cxmachinery@zjchaoxin.com

Whatsapp/Wechat: +86-13958915221



[www.zjchaoxin.com](http://www.zjchaoxin.com)



# 目录 CONTENTS

**P03** 企业简介  
Company profile

**P05** 6S管理  
6s management

**P07** 创始人故事  
The founder story

**P09** 设备简介  
Equipment brief introduction

**P11** 多层共挤上旋吹膜机  
(IBC系统)  
Multi layer co-extrusion oscillating tower film blowing machine (with IBC system)

**P13** ABC三层共挤上旋吹膜机  
(IBC系统)  
ABC three-layer co-extrusion oscillating tower film blowing machine (with IBC system)

**P15** ABC三层共挤吹膜机  
ABC three-layer co-extrusion film blowing machine

**P17** AB农用地膜吹膜机  
AB two-layer agricultural mulching film blowing machine

**P19** 农用地膜吹膜机  
Agricultural mulching film blowing machine

**P20** ABA高/低压吹膜机  
ABA HDPE/LDPE film blowing machine

**P21** ABA高速高低压吹膜机  
(PLC自动换卷)  
ABA HDPE/LDPE high speed automatic film blowing machine (with automatic PLC winder)

**P22** ABA双排高速吹膜机  
(PLC自动换卷)  
ABA twins units HDPE/LDPE high speed automatic film blowing machine (with automatic PLC winder)

**P23** AB高低压吹膜机  
(PLC自动换卷)  
AB HDPE/LDPE high speed automatic film blowing machine (with automatic PLC winder)

**P24** 高速高低压吹膜机  
(EMS)  
HDPE/LDPE high speed automatic film blowing machine (with EMS)

**P25** 高低压吹膜机  
HDPE/LDPE film blowing machine

**P26** 印刷连体吹膜机  
with online printing  
HDPE/LDPE film blowing machine with online printing

**P27** 生物降解  
印刷连体吹膜机  
with online printing  
Biodegradable film blowing machine with online printing

**P29** 全自动双道  
高速保压背心袋制袋机  
Fully automatic double lines high speed pressure holding vest bag making machine

**P31** 双道中速背心袋制袋机  
Double lines medium speed vest bag making machine

**P32** 单道高速背心袋制袋机  
Single line high speed vest bag making machine

**P33** 电脑热封冷切制袋机  
双层四线平口袋制袋机  
Hot sealing cold cutting bag making machine / Double-layer four-line hot sealing cold cutting flat bag making machine

**P34** 无张力电脑热封冷切制袋机  
无拉伸热封冷切制袋机  
Non-tension hot sealing cold cutting bag making machine / Non-stretch hot sealing cold cutting bag making machine

**P35** 单道平口连卷袋制袋机  
双道平口连卷袋制袋机 (有芯)  
Semi-auto single line flat-rolling bag making machine (with core) / Semi-auto double lines flat-rolling bag making machine (with core)

**P36** 宠物袋制袋机  
高速双道连卷八折垃圾袋制袋机  
Pet bag making machine (with core) / High speed double line star bottom rolling garbage bag making machine

**P37** 先烫后折连卷垃圾袋制袋机  
全自动穿绳垃圾袋制袋机  
C-folding rolling garbage bag making machine / Fully automatic drawstring garbage bag making machine

**P38** 单道边封 (快递袋) 制袋机  
双道边封 (快递袋) 制袋机  
Single line side sealing (courier bag) bag making machine / Double line side sealing (courier bag) bag making machine

**P39** 全自动平口连卷袋制袋机 (有芯)  
电脑凹版印刷机  
Fully automatic flat-rolling bag making machine (with core) / Gravure printing machine

**P40** 高速卫星柔板印刷机  
柔板两色-四色印刷机  
High speed flexo printing machine / Two/four-color high speed flexo printing machine

**P41** 选配备件  
Optional devices

**P42** 战略合作伙伴  
Strategic partners

**P43** 与朋友们的合影  
Photo with our friends

**P45** 超信全球服务  
Chaoxin global service

## 为什么选择我们? WHY US?

自成立以来，我们一直专注于吹膜机、印刷机、制袋机的研发。因此，我们的产品符合 ISO 和主流国际标准。因其精度高、可靠性优良、功能齐全而深受国内外客户的高度美誉。

### 先进的工艺

我们拥有国际一流的生产工艺和产品研发，以及高素质的工程师团队。

### 定制化的解决方案

为您的生产需求量身定做，提供高效、极具性价比的生产方案。

### 无微不至的服务

24小时及时响应，为您提供专业的售前、售中、售后支持。核心产品质保三年，用户体验更安心。

Since our inception, we've focused on developing film blowing, Printing, and bag-making machines. Our products meet ISO international standards, earning high praise for precision, reliability, and functionality worldwide.

### ADVANCED TECHNOLOGY


We have world-class production technology and product research and development, and a skilled engineer team.

### TAILORED SOLUTIONS

Customized efficient and cost-effective production solutions

### ATTENTIVE SERVICE

24 hours timely response to provide you with professional pre-sales, sales, and after-sales service support. Our main parts have a 3-year warranty, and provide to the user with a more secure experience.

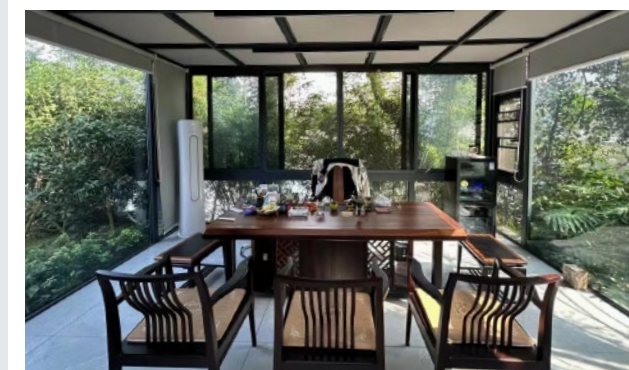



30+

各项专利  
Various patents

50000+

现代化厂房50000+平方米  
Modern plants 50,000+ square meters

30+

技术人员30+  
Technician 30+

1000+

生产设备1000+台  
Production equipment 1000+

89+

出口国家和地区89+  
Export -countries and regions 89+

## 亮点和里程碑 OUR HISTORY



2014

2014年，成立温州正信机械有限公司，从事包装设备机械；塑料加工专用设备制造。Wenzhou Zhengxin Machinery Co., Ltd. was established to engage in packaging equipment and machinery.

2015

批量生产ABA吹膜机，增加印刷设备制造。Mass production of film blowing machines and printing equipment manufacturing.

2016

批量生产三层共挤吹膜机。Mass production of three-layer co-extrusion film blowing machine.

2017

建立全生物降解研发部门。Establish a fully biodegradable R&D department.

2018

成立浙江超信机械科技有限公司，专研生产全生物降解吹膜设备。Zhejiang Chaoxin Machinery Technology Co., Ltd. was established, specializing in the production of high-speed film blowing equipment.

2019

全生物降解吹膜设备进入海南市场，同年被各大企业采购。Fully biodegradable film blowing equipment entered the market and was purchased by major companies in the same year.

2020

全生物降解吹膜机不断研发投入，使每小时产量大幅领先同行。With continuous investment in research and development of high-speed film blowing machines, the output per hour has been significantly ahead of its peers.

2021

厂房变更扩建为90余亩现代化标准厂房，同行业中占地面积位列前茅。The modern standard factory building covering an area of 90 acres is put into use, and the second phase of the factory is planned to cover 200 acres.

2022

成立浙江超正进出口贸易有限公司，从事出口贸易，深耕高精进口贸易；同年成立温州市超正文化传媒有限公司，创新自媒体宣传，打造网红文化。Zhejiang Chaozheng Import and Export Trading Co., Ltd. was established to expand export trade and deepen high-precision import trade.

2024

未来规划200余亩..... Reached technical alliances with various friends and expanded the new factory for around 200 acres in the second phase.

# 6S管理

## 6S MANAGEMENT



超信致力为客户打造品质优秀的产品。  
确保了每一零件加工的高精度和高可靠性，带给客户更好的产品体验。

Chaoxin is committed to creating high-quality products for our customers.  
We ensure high precision and reliability in every component,  
delivering an enhanced product experience for our clients.



# 创始人故事

## THE FOUNDER STORY

超越自我 信守未来  
Beyond Yourself  
Keep the Future

Eason Fan is chief executive officer (CEO) of the CHAOXIN Machinery Technology CO.,LTD and chairman of the executive board of Zhejiang CHAOXIN Technology CO.,LTD.

Eason Fan has been engaged in the plastic packaging industry for 18 years, from a technical engineer to a sales champion, and then to the founder of CHAOXIN brand. His knowledge of plastic raw materials and plastic packaging machinery has reached the level of a senior expert, and he is now an honorary expert of China Plastics Industry Association.

**EASON FAN**  
Chief executive officer



**LEO CHEN**  
Chief Marketing Officer



Leo Chen is chief Marketing officer (CMO) of the CHAOXIN Machinery Technology CO.,LTD and member of the executive board of Zhejiang CHAOXIN Technology CO.,LTD.

Leo Chen has been in the plastic packaging industry for 10 years and is responsible for the brand positioning of Chaoxin Machinery Technology. He has a deep understanding of the development of the global plastic packaging industry.

# 专注于塑料机械解决方案

## FOCUS ON PLASTIC MACHINERY SOLUTIONS

可根据客户要求提供定制吹膜机、制袋机、印刷机等机器。

Provide customized production line solutions of film blowing and bag making according to customers' requirements.

### 应用领域

设备广泛应用于食品包装、日用品包装、农业、医疗、汽车、电子、建筑以及特殊应用等领域，不但能全面提升产品质量和档次，而且大大提高了生产效率。

### APPLICATION FIELD

The equipment is widely used in food packaging, daily necessities packaging, agriculture, medical care, automobiles, electronics, construction and special applications, which can not only comprehensively improve product quality and grade, but also greatly improve production efficiency.



# FILM BLOWING MACHINE

## CX-1700-2600


多层共挤上旋吹膜机 (IBC系统)  
 MULTI LAYER CO-EXTRUSION OSCILLATING  
 TOWER FILM BLOWING MACHINE (WITH IBC SYSTEM)




7-LAYER CO-EXTRUSION

9-LAYER CO-EXTRUSION


11-LAYER CO-EXTRUSION

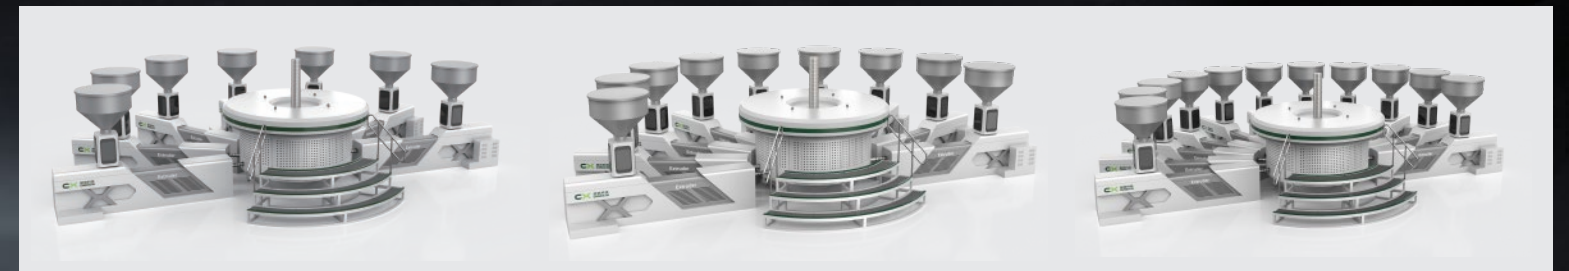

原材料 RAW MATERIAL

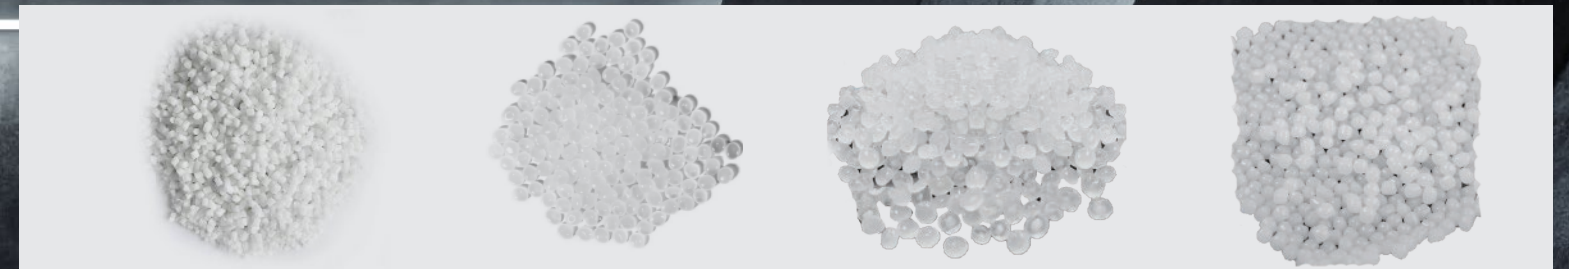

成品 FINAL PRODUCT

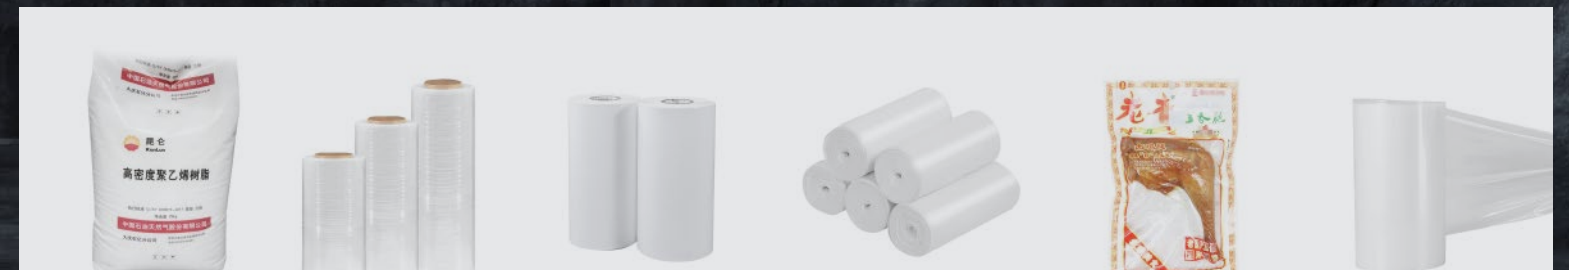

| 型号      | MODEL                     | CX-75-1700                         | CX-95-2200                         |
|---------|---------------------------|------------------------------------|------------------------------------|
| 适用原料    | Suitable materials        | LDPE, LLDPE, MLLDPE, EVA, PA, EVOH | LDPE, LLDPE, MLLDPE, EVA, PA, EVOH |
| 产品宽度    | Film width                | 1600mm                             | 2100mm                             |
| 产品厚度    | Film thickness            | 0.05-0.2mm                         | 0.05-0.2mm                         |
| 最大挤出量   | Max.extrusion output      | 500kg/h                            | 680kg/h                            |
| 螺杆直径    | Screw diameter            | Φ60*5/Φ65*2                        | Φ65*6/Φ70*3                        |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1                          | 32:1/30:1                          |
| 齿轮箱     | Gearbox                   | 180*5/200*2                        | 180*6/220*3                        |
| 主机功率    | Main motor                | 22kw*5/30kw*2                      | 22KW*6/37KW*3                      |
| 风机功率    | Air blower                | 15kw                               | 22KW                               |
| 平均耗电量   | Average power consumption | 420kw                              | 680KW                              |
| 模口大小    | Die diameter              | 350mm                              | 550mm                              |
| 牵引辊宽度   | Traction roller width     | 1700mm                             | 2200mm                             |
| 外形尺寸/重量 | Dimension/Weight          | 20*8.5*14m/25T                     | 25*10*18m/35T                      |



| 型号      | MODEL                     | CX-ABC-1700 (WITH IBC) | CX-ABC-2200 (WITH IBC) | CX-ABC-2600 (WITH IBC) |
|---------|---------------------------|------------------------|------------------------|------------------------|
| 适用原料    | Suitable materials        | LDPE, LLDPE, PBAT+PLA  | LDPE, LLDPE, PBAT+PLA  | LDPE, LLDPE, PBAT+PLA  |
| 产品宽度    | Film width                | 1000-1600mm            | 1300-2100mm            | 1800-2500mm            |
| 产品厚度    | Film thickness            | 0.02-0.20mm            | 0.02-0.20mm            | 0.02-0.20mm            |
| 最大挤出量   | Max.extrusion output      | 240kg/h                | 350kg/h                | 400kg/h                |
| 螺杆直径    | Screw diameter            | Φ60/Φ65/Φ60            | Φ65/Φ70/Φ65            | Φ75/Φ80/Φ75            |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1              | 32:1/30:1              | 32:1/30:1              |
| 齿轮箱     | Gearbox                   | 180*3                  | 180*2/200*1            | 200*2/225*1            |
| 主机功率    | Main motor                | 22/30/22kw             | 30/37/30kw             | 45/55/45kw             |
| 风机功率    | Air blower                | 7.5kw                  | 11kw                   | 15kw                   |
| 平均耗电量   | Average power consumption | 85kw                   | 110kw                  | 140kw                  |
| 模口大小    | Die diameter              | 350mm                  | 500mm                  | 550mm                  |
| 牵引辊宽度   | Traction roller width     | 1700mm                 | 2200mm                 | 2600mm                 |
| 外形尺寸/重量 | Dimension/Weight          | 8.5*5.5*7.5m/15T       | 9*7.5*10.5m/20T        | 10*10.5*12.5m/25T      |

## FILM BLOWING MACHINE

# CX-1300-2600

ABC三层共挤上旋吹膜机 (IBC系统)  
 ABC THREE-LAYER CO-EXTRUSION OSCILLATING  
 TOWER FILM BLOWING MACHINE  
 (WITH IBC SYSTEM)





# FILM BLOWING MACHINE

## CX-1300-2200

ABC三层共挤吹膜机  
ABC THREE-LAYER CO-EXTRUSION  
FILM BLOWING MACHINE



| 型号      | MODEL                     | CX-ABC-1300       | CX-ABC-1600       | CX-ABC-2200       |
|---------|---------------------------|-------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT |
| 产品宽度    | Film width                | 800-1200mm        | 1000-1500mm       | 1200-2050mm       |
| 产品厚度    | Film thickness            | 0.02-0.20mm       | 0.02-0.20mm       | 0.02-0.20mm       |
| 最大挤出量   | Max.extrusion output      | 180kg/h           | 220kg/h           | 280Kg/h           |
| 螺杆直径    | Screw diameter            | Φ55/Φ60/Φ55       | Φ60/Φ65/Φ60       | Φ65/Φ70/Φ65       |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1         | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 173*2/180*1       | 180*3             | 180*2/200*1       |
| 主机功率    | Main motor                | 18.5/22/18.5kw    | 22/30/22kw        | 30/37/30kw        |
| 风机功率    | Air blower                | 7.5kw             | 7.5kw             | 11kw              |
| 平均耗电量   | Average power consumption | 70kw              | 85kw              | 110kw             |
| 模口大小    | Die diameter              | 250mm             | 350mm             | 500mm             |
| 牵引辊宽度   | Traction roller width     | 1300mm            | 1600mm            | 2200mm            |
| 外形尺寸/重量 | Dimension/Weight          | 8*5*6.5m/5T       | 8.5*5.5*7.5m/6T   | 8.5*6.5*9.5m/8T   |

# FILM BLOWING MACHINE

## CX-1300-2200

AB农用地膜吹膜机  
 AB TWO-LAYER AGRICULTURAL MULCHING  
 FILM BLOWING MACHINE



| 型号      | MODEL                     | CX-1300AB         | CX-1700AB         | CX-2200AB         |
|---------|---------------------------|-------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT |
| 产品宽度    | Film width                | 800-1200mm        | 1000-1600mm       | 1200-2100mm       |
| 产品厚度    | Film thickness            | 0.006-0.03mm      | 0.006-0.03mm      | 0.006-0.03mm      |
| 最大挤出量   | Max.extrusion output      | 150kg/180kg       | 160kg/200kg       | 220kg/260kg       |
| 螺杆直径    | Screw diameter            | 60mm *2           | 65mm *2           | 70mm*2            |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1         | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 173*2             | 180*2             | 200*2             |
| 主机功率    | Main motor                | 22kw*2            | 30kw*2            | 37kw*2            |
| 风机功率    | Air blower                | 5.5kw             | 7.5kw             | 11kw              |
| 平均耗电量   | Average power consumption | 45kw              | 55kw              | 65kw              |
| 模口大小    | Die diameter              | 250mm             | 350mm             | 500mm             |
| 牵引辊宽度   | Traction roller width     | 1300mm            | 1700mm            | 2200mm            |
| 外形尺寸/重量 | Dimension/Weight          | 6*4.5*6.5m/5.5T   | 6*5.5*7.5m/6T     | 7*6.5*9.5m/8T     |

## FILM BLOWING MACHINE

# CX-1300-2200

农用地膜吹膜机  
AGRICULTURAL MULCHING FILM  
BLOWING MACHINE



| 型号      | MODEL                     | CX-1300           | CX-1700           | CX-2200           |
|---------|---------------------------|-------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT | LDPE, LLDPE, PBAT |
| 产品宽度    | Film width                | 800-1200mm        | 1000-1600mm       | 1200-2100mm       |
| 产品厚度    | Film thickness            | 0.006-0.03mm      | 0.006-0.03mm      | 0.006-0.03mm      |
| 最大挤出量   | Max.extrusion output      | 100kg/150kg       | 120kg/180kg       | 150kg/200kg       |
| 螺杆直径    | Screw diameter            | 65mm              | 75mm              | 85mm              |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1         | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 180               | 200               | 225               |
| 主机功率    | Main motor                | 30kw              | 37kw              | 45kw              |
| 风机功率    | Air blower                | 5.5kw             | 7.5kw             | 11kw              |
| 平均耗电量   | Average power consumption | 30kw              | 40kw              | 50kw              |
| 模口大小    | Die diameter              | 250mm             | 350mm             | 500mm             |
| 牵引辊宽度   | Traction roller width     | 1300mm            | 1700mm            | 2200mm            |
| 外形尺寸/重量 | Dimension/Weight          | 6*3.5*6.5m/4T     | 6*4*7.5m/5.5T     | 7*4.5*9.5m/7.5T   |

## FILM BLOWING MACHINE

# CX-1300-2000

ABA高低压吹膜机  
ABA HDPE/LDPE FILM  
BLOWING MACHINE



| 型号      | MODEL                     | CX-ABA-1300          | CX-ABA-1600       | CX-ABA-2000       |       |
|---------|---------------------------|----------------------|-------------------|-------------------|-------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |       |
| 产品宽度    | Film width                | 600-1200mm           | 1000-1500mm       | 1400-1900mm       |       |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |       |
| 最大挤出量   | HDPE                      | Max.extrusion output | 120kg             | 150kg             | 220kg |
|         | LDPE                      | Max.extrusion output | 150kg             | 180kg             | 260kg |
| 螺杆直径    | Screw diameter            | 55mm*2               | 60mm*2            | 75mm*2            |       |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |       |
| 齿轮箱     | Gearbox                   | 173*2                | 180*2             | 200*2             |       |
| 主机功率    | Main motor                | 18.5kw*2             | 30kw*2            | 37kw*2            |       |
| 风机功率    | Air blower                | 5.5kw                | 7.5kw             | 11kw              |       |
| 平均耗电量   | Average power consumption | 35kw                 | 60kw              | 90kw              |       |
| 模口大小    | HDPE                      | Die diameter         | 120mm             | 150mm             | 250mm |
|         | LDPE                      | Die diameter         | 250mm             | 300mm             | 500mm |
| 牵引辊宽度   | Traction roller width     | 1300mm               | 1600mm            | 2000mm            |       |
| 外形尺寸/重量 | Dimension/Weight          | 6*4.5*6.5m/4T        | 7*5.5*7.5m/5.5T   | 8*6.5*9m/7T       |       |

## FILM BLOWING MACHINE

# CX-900-1300

ABA高速高低压吹膜机 (PLC自动换卷)  
ABA HDPE/LDPE HIGH SPEED AUTOMATIC  
FILM BLOWING MACHINE  
(WITH AUTOMATIC PLC WINDER)



| 型号      | MODEL                     | CX-ABA-900           | CX-ABA-1100       | CX-ABA-1300       |
|---------|---------------------------|----------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |
| 产品宽度    | Film width                | 400-800mm            | 500-1000mm        | 600-1200mm        |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |
| 最大挤出量   | HDPE                      | Max.extrusion output | 85kg              | 100kg             |
|         | LDPE                      | Max.extrusion output | 100kg             | 130kg             |
| 螺杆直径    | Screw diameter            | 50mm*2/45mm*2        | 55mm*2/50mm*2     | 60mm*2/55mm*2     |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 146*2                | 146*2/173*2       | 173*2/180*2       |
| 主机功率    | Main motor                | 15KW*2               | 18.5KW*2          | 18.5KW*2          |
| 风机功率    | Air blower                | 5.5KW                | 7.5KW             | 7.5KW             |
| 平均耗电量   | Average power consumption | 28KW                 | 32KW              | 40KW              |
| 模口大小    | HDPE                      | Die diameter         | 80mm              | 100mm             |
|         | LDPE                      | Die diameter         | 150mm             | 200mm             |
| 牵引辊宽度   | Traction roller width     | 900mm                | 1100mm            | 1100mm            |
| 外形尺寸/重量 | Dimension/Weight          | 5.5*4*5.2m/5T        | 6*5.5*5.8m/6T     | 6.5*5.5*6.5m/7.5T |

## FILM BLOWING MACHINE

# CX-900-1300

ABA双排高速吹膜机 (PLC自动换卷)  
ABA TWINS UNITS HDPE/LDPE HIGH SPEED  
AUTOMATIC FILM BLOWING MACHINE  
(WITH AUTOMATIC PLC WINDER)



| 型号      | MODEL                     | CX-ABA-900           | CX-ABA-1100       | CX-ABA-1300       |
|---------|---------------------------|----------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |
| 产品宽度    | Film width                | 400-800mm            | 500-1000mm        | 600-1200mm        |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |
| 最大挤出量   | HDPE                      | Max.extrusion output | 170kg             | 200kg             |
|         | LDPE                      | Max.extrusion output | 200kg             | 260kg             |
| 螺杆直径    | Screw diameter            | 50mm*4/45mm*4        | 55mm*4/50mm*4     | 60mm*4/55mm*4     |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 146*4                | 146*4/173*4       | 173*4/180*4       |
| 主机功率    | Main motor                | 15KW*4               | 18.5KW*4          | 18.5KW*4          |
| 风机功率    | Air blower                | 5.5KW*2              | 7.5KW*2           | 7.5KW*2           |
| 平均耗电量   | Average power consumption | 56KW                 | 64KW              | 80KW              |
| 模口大小    | HDPE                      | Die diameter         | 80mm*2            | 100mm*2           |
|         | LDPE                      | Die diameter         | 150mm*2           | 200mm*2           |
| 牵引辊宽度   | Traction roller width     | 900mm                | 1100mm            | 1100mm            |
| 外形尺寸/重量 | Dimension/Weight          | 8.5*6*5.2m/8T        | 8.5*6.5*5.8m/10T  | 8.5*7*6.5m/13T    |

## FILM BLOWING MACHINE

# CX-700-1100

AB高低压吹膜机（PLC自动换卷）  
AB HDPE/LDPE HIGH SPEED AUTOMATIC  
FILM BLOWING MACHINE  
(WITH AUTOMATIC PLC WINDER)



| 型号      | MODEL                     | CX-AB-700            | CX-AB-900         | CX-AB-1100        |
|---------|---------------------------|----------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |
| 产品宽度    | Film width                | 100-600mm            | 400-800mm         | 500-1000mm        |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |
| 最大挤出量   | HDPE                      | Max.extrusion output | 70kg              | 85kg              |
|         | LDPE                      | Max.extrusion output | 85kg              | 100kg             |
| 螺杆直径    | Screw diameter            | 45mm*2               | 50mm*2            | 55mm*2/50mm*2     |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 146*2                | 146*2/173*2       | 173*2             |
| 主机功率    | Main motor                | 15KW*2               | 15KW*2            | 18.5KW*2          |
| 风机功率    | Air blower                | 4KW                  | 5.5KW             | 7.5KW             |
| 平均耗电量   | Average power consumption | 25KW                 | 28KW              | 32KW              |
| 模口大小    | HDPE                      | Die diameter         | 60mm              | 80mm              |
|         | LDPE                      | Die diameter         | 120mm             | 150mm             |
| 牵引辊宽度   | Traction roller width     | 700mm                | 900mm             | 1100mm            |
| 外形尺寸/重量 | Dimension/Weight          | 5*3.5*5.2m/4T        | 5*4*5.2m/4.5T     | 5.5*4.5*5.8m/5T   |

## FILM BLOWING MACHINE

# CX-1300-2100

高速高低压吹膜机（EMS）  
HDPE/LDPE HIGH SPEED AUTOMATIC  
FILM BLOWING MACHINE (WITH EMS)



| 型号      | MODEL                     | CX-1300              | CX-1600           | CX-2100           |
|---------|---------------------------|----------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |
| 产品宽度    | Film width                | 800-1200mm           | 1000-1500mm       | 1200-2000mm       |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |
| 最大挤出量   | HDPE                      | Max.extrusion output | 100kg             | 120kg             |
|         | LDPE                      | Max.extrusion output | 150kg             | 180kg             |
| 螺杆直径    | Screw diameter            | 65mm                 | 70mm              | 80mm              |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 200                  | 200               | 250               |
| 主机功率    | Main motor                | 30kw                 | 37kw              | 45kw              |
| 风机功率    | Air blower                | 5.5kw                | 7.5kw             | 11kw              |
| 平均耗电量   | Average power consumption | 30kw                 | 40kw              | 50kw              |
| 模口大小    | HDPE                      | Die diameter         | 120mm             | 180mm             |
|         | LDPE                      | Die diameter         | 250mm             | 350mm             |
| 牵引辊宽度   | Traction roller width     | 1300mm               | 1600mm            | 2100mm            |
| 外形尺寸/重量 | Dimension/Weight          | 6*3.5*6.5m/5.5T      | 6*4*7.5m/7T       | 7*4.5*9.5m/8.5T   |

## FILM BLOWING MACHINE

# CX-700-1100

高低压吹膜机  
HDPE/LDPE FILM BLOWING MACHINE



| 型号      | MODEL                     | CX-700               | CX-900            | CX-1100           |
|---------|---------------------------|----------------------|-------------------|-------------------|
| 适用原料    | Suitable materials        | HDPE, LDPE, LLDPE    | HDPE, LDPE, LLDPE | HDPE, LDPE, LLDPE |
| 产品宽度    | Film width                | 100-600mm            | 400-800mm         | 500-1000mm        |
| 产品厚度    | Film thickness            | 0.006-0.10mm         | 0.006-0.10mm      | 0.006-0.10mm      |
| 最大挤出量   | HDPE                      | Max.extrusion output | 60kg              | 80kg              |
|         | LDPE                      | Max.extrusion output | 80kg              | 100kg             |
| 螺杆直径    | Screw diameter            | 50mm                 | 55mm              | 60mm              |
| 螺杆长径比   | Screw L/D                 | 32:1/30:1            | 32:1/30:1         | 32:1/30:1         |
| 齿轮箱     | Gearbox                   | 146                  | 173               | 180               |
| 主机功率    | Main motor                | 15kw                 | 18.5kw            | 22kw              |
| 风机功率    | Air blower                | 3kw                  | 4kw               | 5.5kw             |
| 平均耗电量   | Average power consumption | 18kw                 | 23kw              | 28kw              |
| 模口大小    | HDPE                      | Die diameter         | 60mm              | 80mm              |
|         | LDPE                      | Die diameter         | 120mm             | 150mm             |
| 牵引辊宽度   | Traction roller width     | 700mm                | 900mm             | 1100mm            |
| 外形尺寸/重量 | Dimension/Weight          | 6*3*5.2m/3.5T        | 6*3*5.2m/4T       | 6*3.2*6.2m/4.5T   |

## FILM BLOWING MACHINE

# CX-700-1100

印刷连体吹膜机  
HDPE/LDPE FILM BLOWING MACHINE  
WITH ONLINE PRINTING



| 型号      | MODEL                       | CX-700                       | CX-900                       | CX-1100                      |
|---------|-----------------------------|------------------------------|------------------------------|------------------------------|
| 适用原料    | Suitable materials          | HDPE, LDPE, LLDPE, PBAT, PLA | HDPE, LDPE, LLDPE, PBAT, PLA | HDPE, LDPE, LLDPE, PBAT, PLA |
| 产品宽度    | Film width                  | 100-600mm                    | 400-800mm                    | 500-1000mm                   |
| 产品厚度    | Film thickness              | 0.006-0.10mm                 | 0.006-0.10mm                 | 0.006-0.10mm                 |
| 印刷宽度    | Max.printing width          | 560mm                        | 760mm                        | 960mm                        |
| 印刷长度    | Printing length             | 250-700mm                    | 250-700mm                    | 250-700mm                    |
| 套印精度    | Precision of color printing | 横向±0.2纵向±0.2mm               | 横向±0.2纵向±0.2mm               | 横向±0.2纵向±0.2mm               |
| 最大挤出量   | HDPE                        | Max.extrusion output         | 50kg                         | 70kg                         |
|         | LDPE                        | Max.extrusion output         | 80kg                         | 100kg                        |
| 螺杆直径    | Screw diameter              | 50                           | 55                           | 60                           |
| 螺杆长径比   | Screw L/D                   | 32:1/30:1                    | 32:1/30:1                    | 32:1/30:1                    |
| 齿轮箱     | Gearbox                     | 146                          | 173                          | 180                          |
| 主机功率    | Main motor                  | 15kw                         | 18.5kw                       | 22kw                         |
| 风机功率    | Air blower                  | 4kw                          | 5.5kw                        | 5.5kw                        |
| 平均耗电量   | Average power consumption   | 30kw                         | 35kw                         | 45kw                         |
| 模口大小    | HDPE                        | Die diameter                 | 60mm                         | 80mm                         |
|         | LDPE                        | Die diameter                 | 120mm                        | 160mm                        |
| 牵引辊宽度   | Traction roller width       | 700mm                        | 900mm                        | 1100mm                       |
| 外形尺寸/重量 | Dimension/Weight            | 7.5*3.5*5.2m/5.5T            | 8*4*5.2m/6.5T                | 8.5*4.5*5.8m/7T              |

# FILM BLOWING MACHINE

## CX-700-1100

生物降解印刷连体吹膜机  
BIODEGRADABLE FILM BLOWING MACHINE  
WITH ONLINE PRINTING

| 型号      | MODEL                       | CX-700               | CX-900             | CX-1100            |       |
|---------|-----------------------------|----------------------|--------------------|--------------------|-------|
| 适用原料    | Suitable materials          | PBAT, PLA +MD/ST     | PBAT, PLA +MD/ST   | PBAT, PLA +MD/ST   |       |
| 产品宽度    | Film width                  | 600mm                | 800mm              | 1000mm             |       |
| 产品厚度    | Film thickness              | 0.006-0.04mm         | 0.006-0.04mm       | 0.006-0.04mm       |       |
| 印刷宽度    | Max.printing width          | 595mm                | 795mm              | 995mm              |       |
| 印刷长度    | Printing length             | 250-700mm            | 250-700mm          | 250-700mm          |       |
| 套印精度    | Precision of color printing | 横向±0.2mm, 纵向±0.2mm   | 横向±0.2mm, 纵向±0.2mm | 横向±0.2mm, 纵向±0.2mm |       |
| 最大挤出量   | MD                          | Max.extrusion output | 80kg               | 120kg              | 160kg |
|         | ST                          | Max.extrusion output | 85kg               | 125kg              | 170kg |
| 螺杆直径    | Screw diameter              | 50mm                 | 55mm               | 60mm               |       |
| 螺杆长径比   | Screw L/D                   | 32:1                 | 32:1               | 32:1               |       |
| 齿轮箱     | Gearbox                     | 146                  | 173                | 180                |       |
| 主机功率    | Main motor                  | 15kw                 | 18.5kw             | 22kw               |       |
| 风机功率    | Air blower                  | 5.5kw                | 5.5kw              | 7.5kw              |       |
| 平均耗电量   | Average power consumption   | 18kw                 | 20kw               | 25kw               |       |
| 模口大小    | Die diameter                | 120mm                | 150mm              | 200mm              |       |
| 牵引辊宽度   | Traction roller width       | 700mm                | 900mm              | 1100mm             |       |
| 外形尺寸/重量 | Dimension/Weight            | 8.5*3*5.2m / 5.5T    | 8.5*3.5*5.2m /6.5T | 8.5*4*6.2m /7T     |       |




# BAG MAKING MACHINE

## CX-430-550X2

全自动双道高速保压背心袋制袋机  
 FULLY AUTOMATIC DOUBLE LINES HIGH SPEED  
 PRESSURE HOLDING VEST BAG MAKING MACHINE



| 型号      | MODEL              | CX-430*2             | CX-550*2             |
|---------|--------------------|----------------------|----------------------|
| 适用原料    | Suitable materials | LDPE, HDPE, PLA+PBAT | LDPE, HDPE, PLA+PBAT |
| 制袋宽度    | Bag width          | 200-400mm            | 200-500mm            |
| 制袋长度    | Bag length         | 300-720mm            | 300-800mm            |
| 制袋厚度    | Bag thickness      | 0.005-0.05mm         | 0.005-0.05mm         |
| 制袋速度    | Speed              | 400*2pcs/min         | 350*2pcs/min         |
| 总功率     | Total power        | 14kw                 | 16kw                 |
| 外形尺寸/重量 | Dimension/Weight   | 7.5*1.7*1.7m/1.3T    | 7.8*1.8*1.75m/1.7T   |

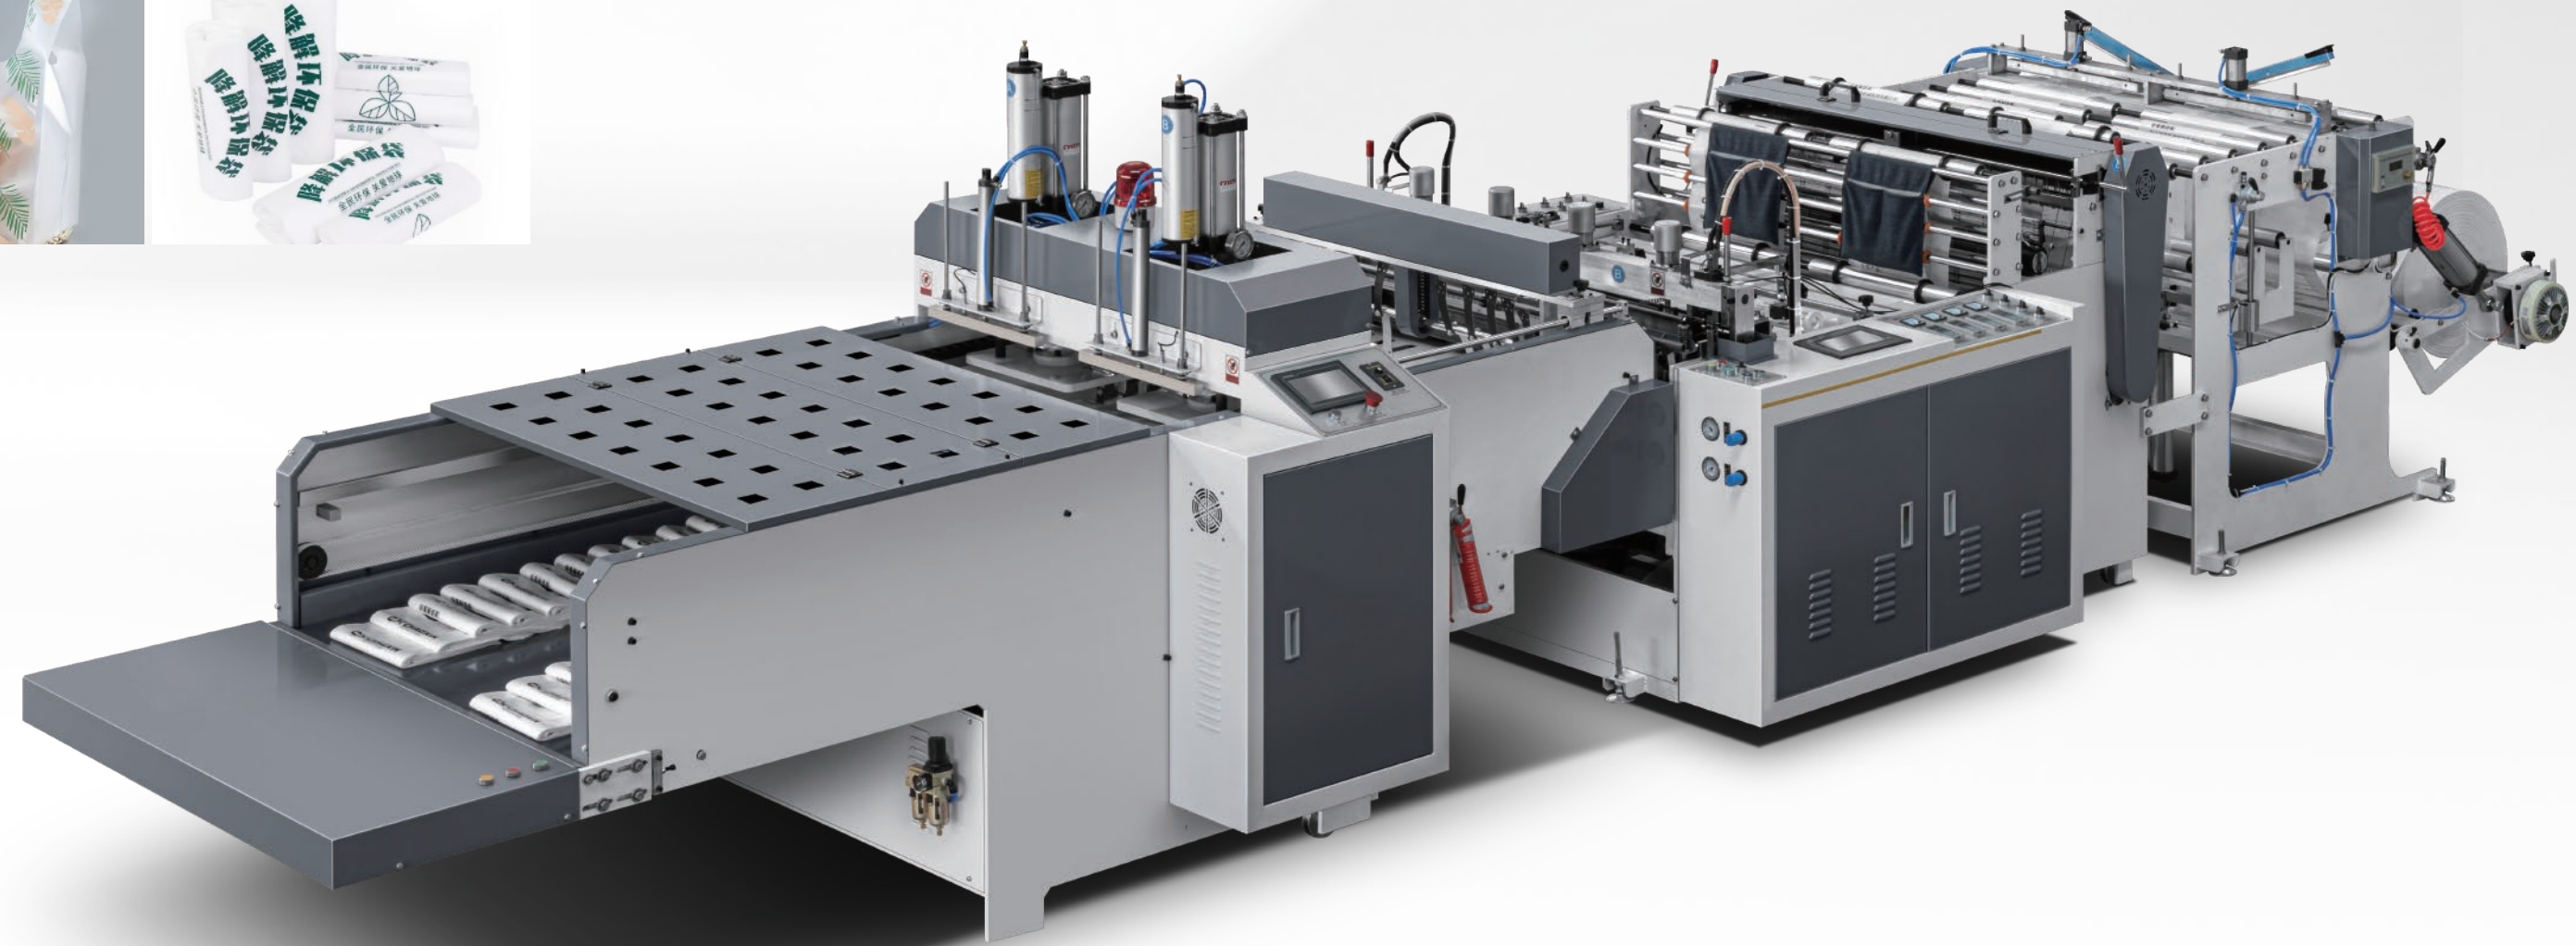




## BAG MAKING MACHINE

# CX-500X2

双道中速背心袋制袋机  
DOUBLE LINES MEDIUM SPEED  
VEST BAG MAKING MACHINE

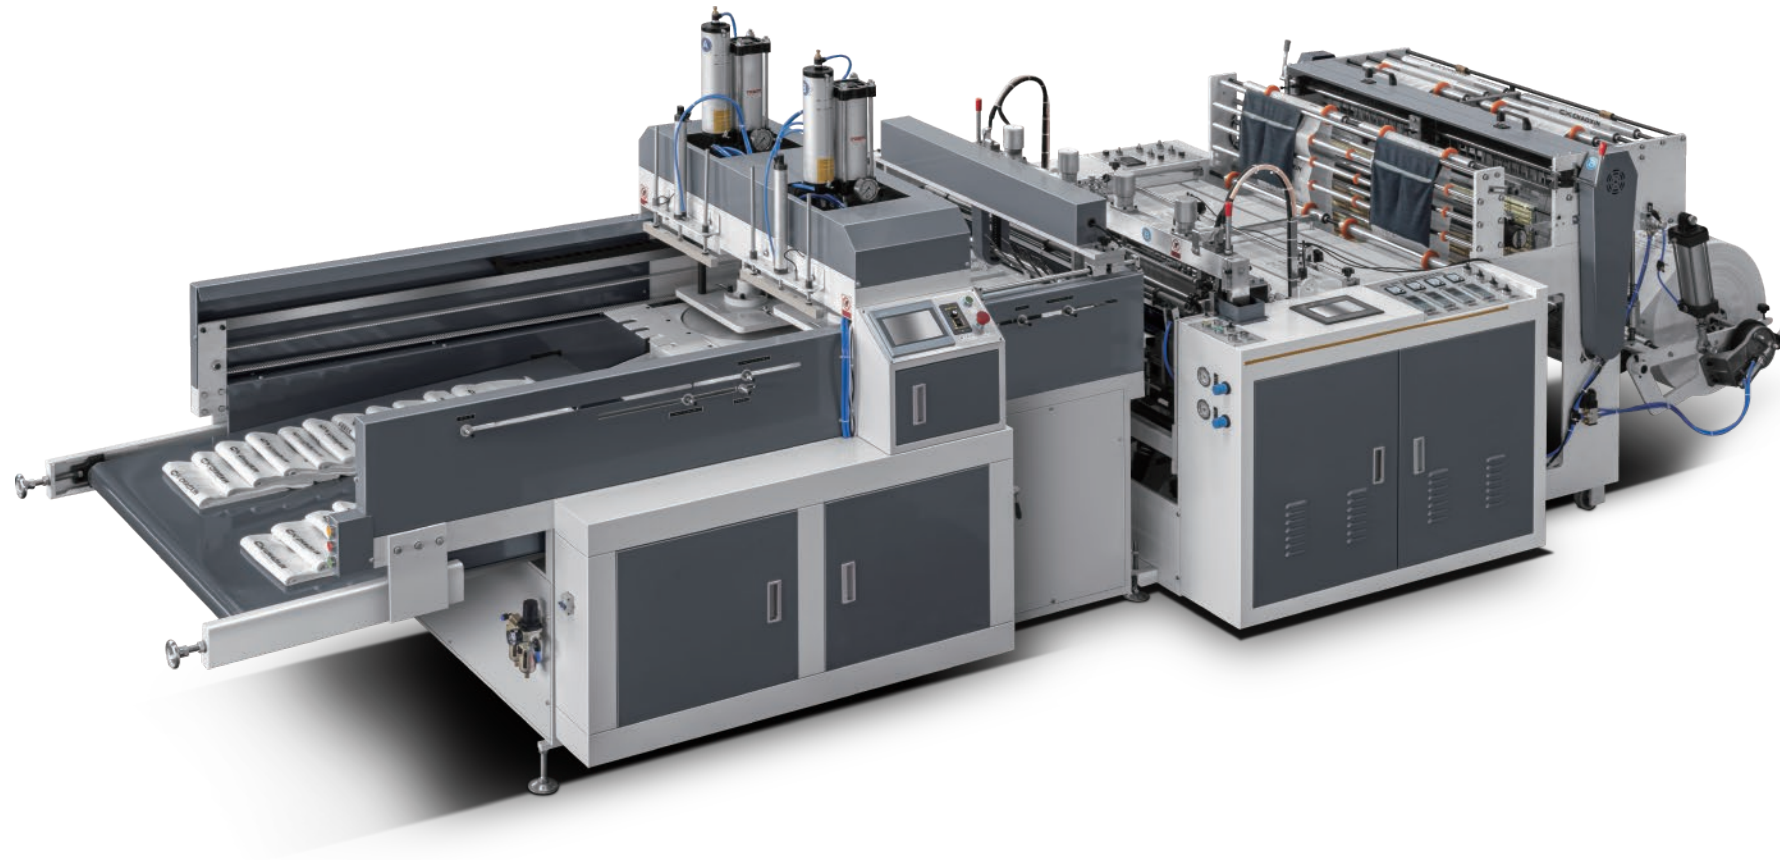


| 型号      | MODEL              | CX-500*2          |
|---------|--------------------|-------------------|
| 适用原料    | Suitable materials | LDPE, HDPE        |
| 制袋宽度    | Bag width          | 200-450mm         |
| 制袋长度    | Bag length         | 300-680mm         |
| 制袋厚度    | Bag thickness      | 0.01-0.06mm       |
| 制袋速度    | Speed              | 200*2pcs/min      |
| 总功率     | Total power        | 12kw              |
| 外形尺寸/重量 | Dimension/Weight   | 6.5*1.8*1.6m/1.5T |

## BAG MAKING MACHINE

# CX-700

单道高速背心袋制袋机  
SINGLE LINE HIGH SPEED VEST  
BAG MAKING MACHINE

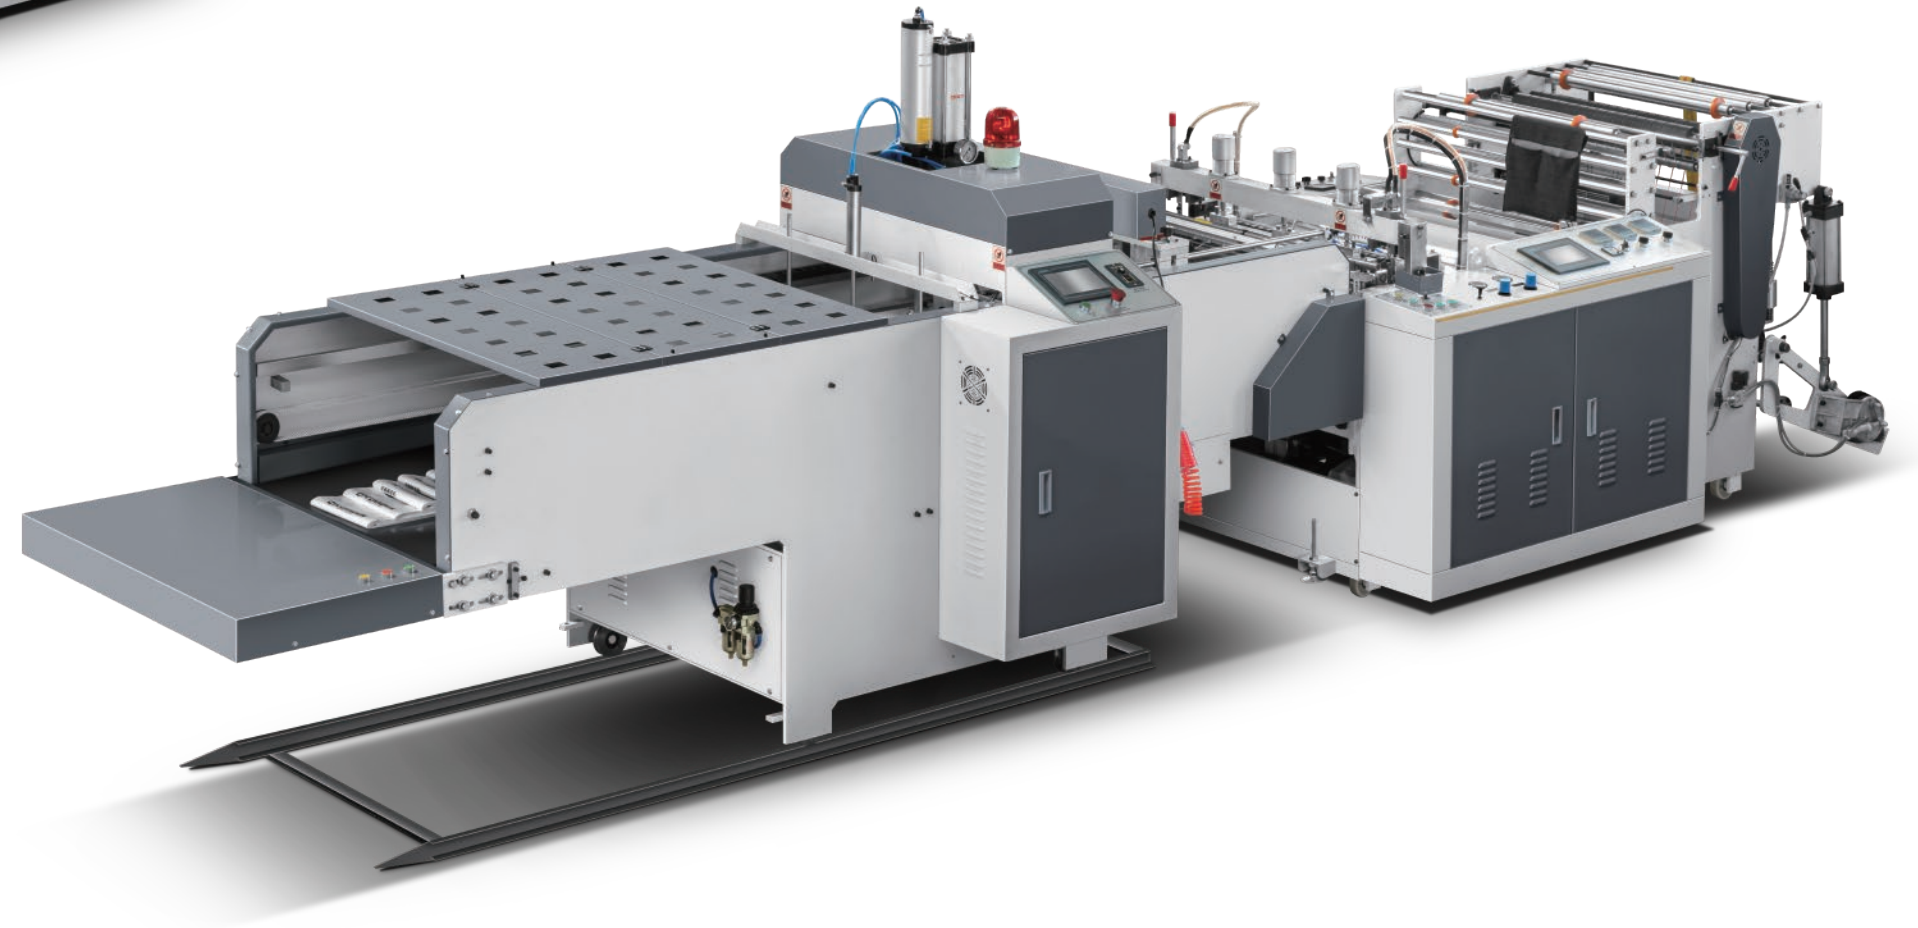


| 型号      | MODEL              | CX-700               |
|---------|--------------------|----------------------|
| 适用原料    | Suitable materials | LDPE, HDPE, PLA+PBAT |
| 制袋宽度    | Bag width          | 200-650mm            |
| 制袋长度    | Bag length         | 1000mm               |
| 制袋厚度    | Bag thickness      | 0.01-0.06mm          |
| 制袋速度    | Speed              | 300pcs/min           |
| 总功率     | Total power        | 7.5kw                |
| 外形尺寸/重量 | Dimension/Weight   | 7.5*1.5*1.7m/1.5T    |

## BAG MAKING MACHINE

### CX-600/1200

电脑热封冷切制袋机  
HOT SEALING COLD CUTTING BAG  
MAKING MACHINE

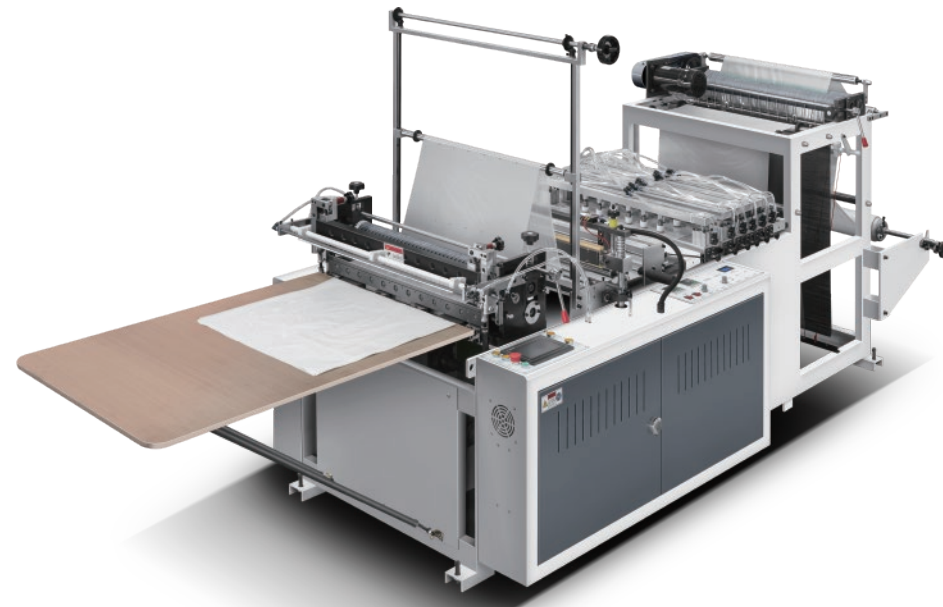


| 型号      | MODEL              | CX-600          | CX-800          | CX-1000           | CX-1200           |
|---------|--------------------|-----------------|-----------------|-------------------|-------------------|
| 适用原料    | Suitable materials | HDPE, LDPE      | HDPE, LDPE      | HDPE, LDPE        | HDPE, LDPE        |
| 制袋宽度    | Bag width          | 550mm           | 750mm           | 950mm             | 1150mm            |
| 制袋长度    | Bag length         | 1800mm          | 1800mm          | 1800mm            | 1800mm            |
| 制袋厚度    | Bag thickness      | 0.01-0.10mm     | 0.01-0.10mm     | 0.01-0.10mm       | 0.01-0.10mm       |
| 制袋速度    | Speed              | 20-120pcs/min   | 20-120pcs/min   | 20-120pcs/min     | 20-120pcs/min     |
| 总功率     | Total power        | 6kw             | 7kw             | 8kw               | 9kw               |
| 外形尺寸/重量 | Dimension/Weight   | 3.2*1.2*1.9m/1T | 3.2*1.4*1.9m/1T | 3.2*1.6*1.9m/1.2T | 3.4*1.8*1.9m/1.2T |


## BAG MAKING MACHINE

### CX-600/1200

无张力电脑热封冷切制袋机  
NON-TENSION HOT SEALING COLD  
CUTTING BAG MAKING MACHINE

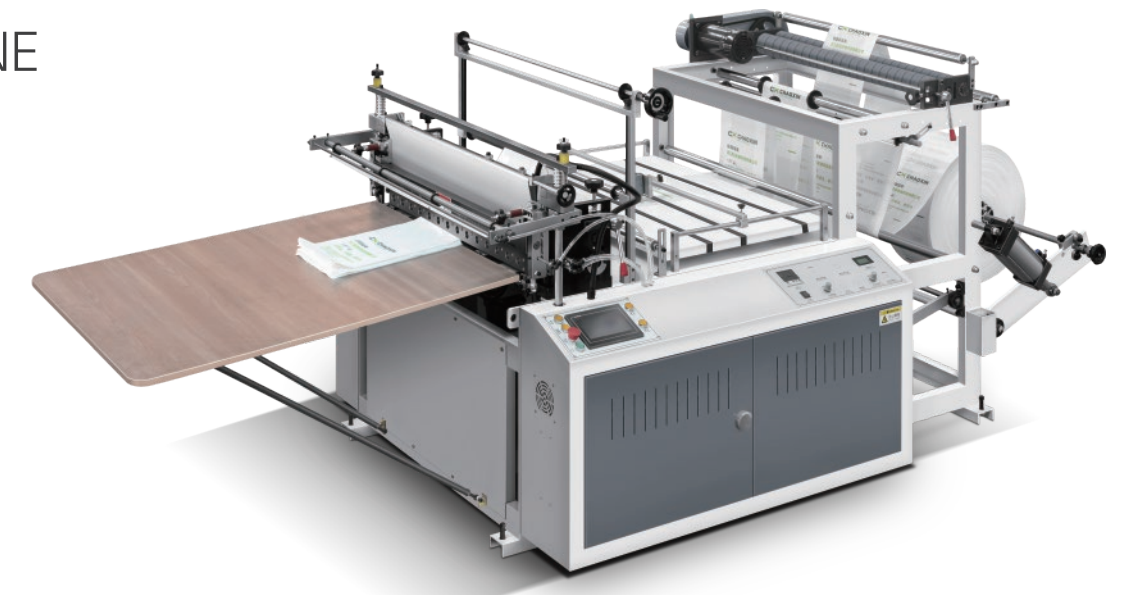


| 型号      | MODEL              | CX-600          | CX-800          | CX-1000           | CX-1200           |
|---------|--------------------|-----------------|-----------------|-------------------|-------------------|
| 适用原料    | Suitable materials | HDPE, LDPE      | HDPE, LDPE      | HDPE, LDPE        | HDPE, LDPE        |
| 制袋宽度    | Bag width          | 550mm           | 750mm           | 950mm             | 1150mm            |
| 制袋长度    | Bag length         | 1800mm          | 1800mm          | 1800mm            | 1800mm            |
| 制袋厚度    | Bag thickness      | 0.01-0.10mm     | 0.01-0.10mm     | 0.01-0.10mm       | 0.01-0.10mm       |
| 制袋速度    | Speed              | 20-120pcs/min   | 20-120pcs/min   | 20-120pcs/min     | 20-120pcs/min     |
| 总功率     | Total power        | 4kw             | 5kw             | 6kw               | 7kw               |
| 外形尺寸/重量 | Dimension/Weight   | 3.2*1.2*1.9m/1T | 3.2*1.4*1.9m/1T | 3.2*1.6*1.9m/1.2T | 3.4*1.8*1.9m/1.2T |

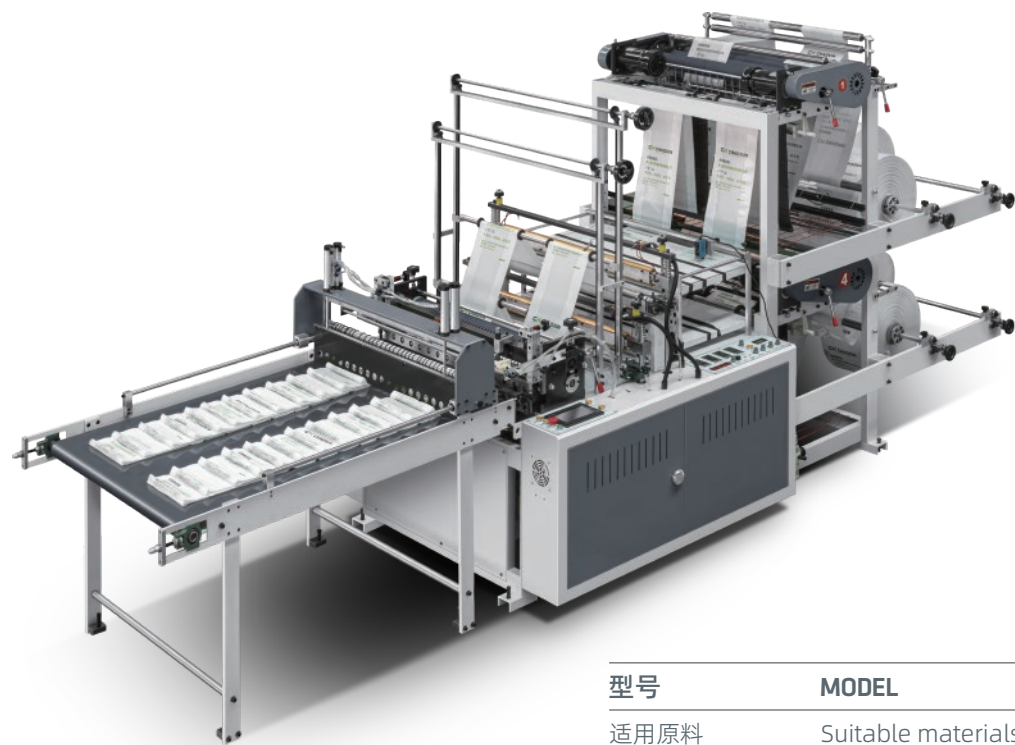

### CX-350-450X4

双层四线平口袋制袋机  
DOUBLE-LAYER FOUR-LINE HOT  
SEALING COLD CUTTING FLAT  
BAG MAKING MACHINE

| 型号      | MODEL              | CX-350*4        | CX-450*4        |
|---------|--------------------|-----------------|-----------------|
| 适用原料    | Suitable materials | HDPE, LDPE      | HDPE, LDPE      |
| 制袋宽度    | Bag width          | 350mm           | 450mm           |
| 制袋长度    | Bag length         | 800mm           | 800mm           |
| 制袋厚度    | Bag thickness      | 0.01-0.10mm     | 0.01-0.10mm     |
| 制袋速度    | Speed              | 30-150pcs/min   | 30-150pcs/min   |
| 总功率     | Total power        | 6kw             | 7kw             |
| 外形尺寸/重量 | Dimension/Weight   | 3.2*1.4*2m/1.2T | 3.6*1.6*2m/1.2T |

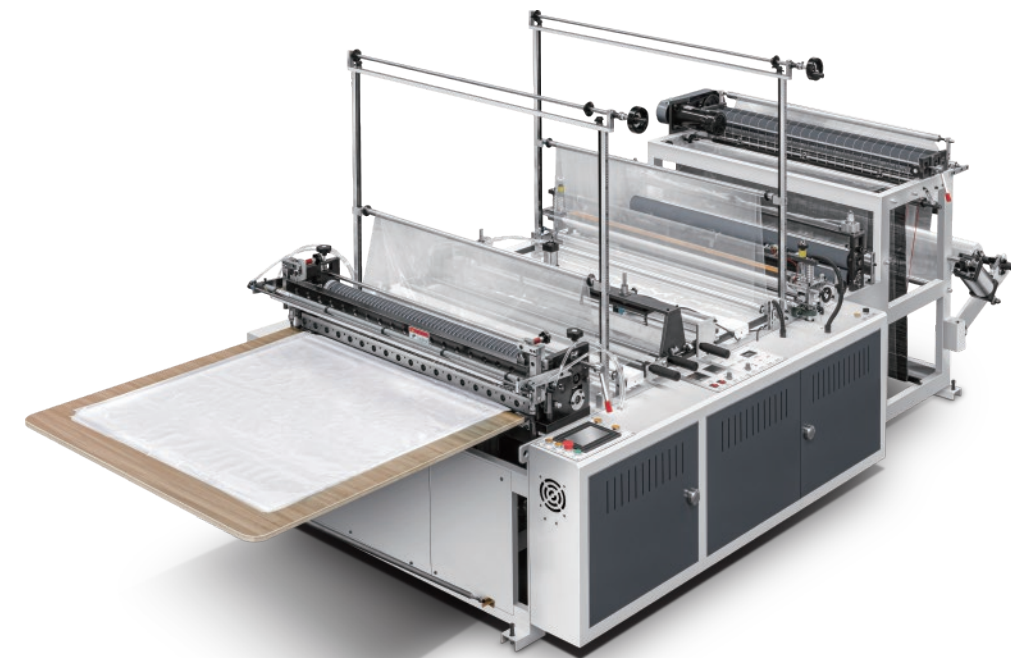

### CX-600/1200



无拉伸热封冷切制袋机  
NON-STRETCH HOT SEALING COLD  
CUTTING BAG MAKING MACHINE

| 型号      | MODEL              | CX-600          | CX-800          | CX-1000           | CX-1200           |
|---------|--------------------|-----------------|-----------------|-------------------|-------------------|
| 适用原料    | Suitable materials | HDPE, LDPE      | HDPE, LDPE      | HDPE, LDPE        | HDPE, LDPE        |
| 制袋宽度    | Bag width          | 550mm           | 750mm           | 950mm             | 1150mm            |
| 制袋长度    | Bag length         | 1800mm          | 1800mm          | 1800mm            | 1800mm            |
| 制袋厚度    | Bag thickness      | 0.01-0.10mm     | 0.01-0.10mm     | 0.01-0.10mm       | 0.01-0.10mm       |
| 制袋速度    | Speed              | 20-120pcs/min   | 20-120pcs/min   | 20-120pcs/min     | 20-120pcs/min     |
| 总功率     | Total power        | 6kw             | 7kw             | 8kw               | 9kw               |
| 外形尺寸/重量 | Dimension/Weight   | 3.2*1.2*1.9m/1T | 3.2*1.4*1.9m/1T | 3.2*1.6*1.9m/1.2T | 3.4*1.8*1.9m/1.2T |

## BAG MAKING MACHINE

### CX-500

单道平口连卷袋制袋机  
SEMI-AUTO SINGLE LINE FLAT - ROLLING  
BAG MAKING MACHINE (WITH CORE)

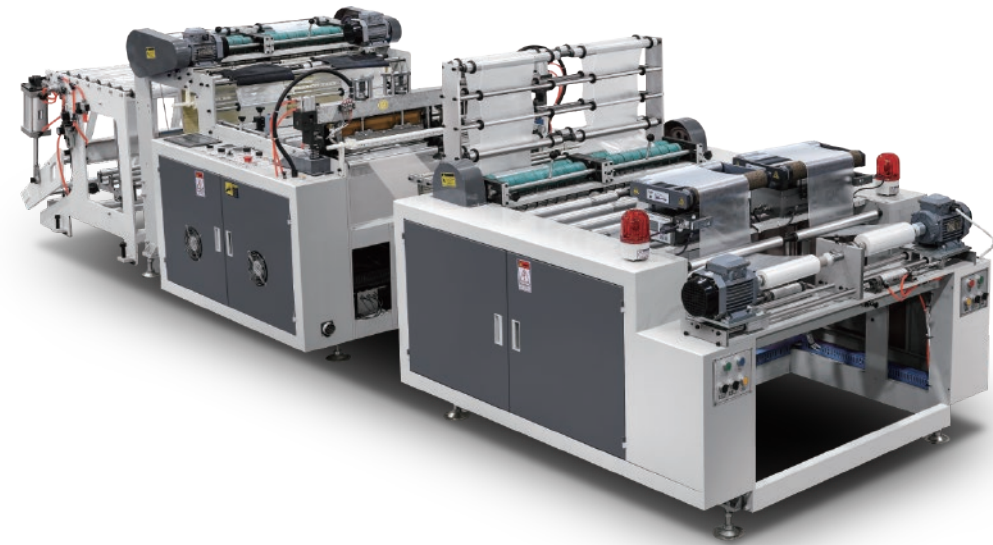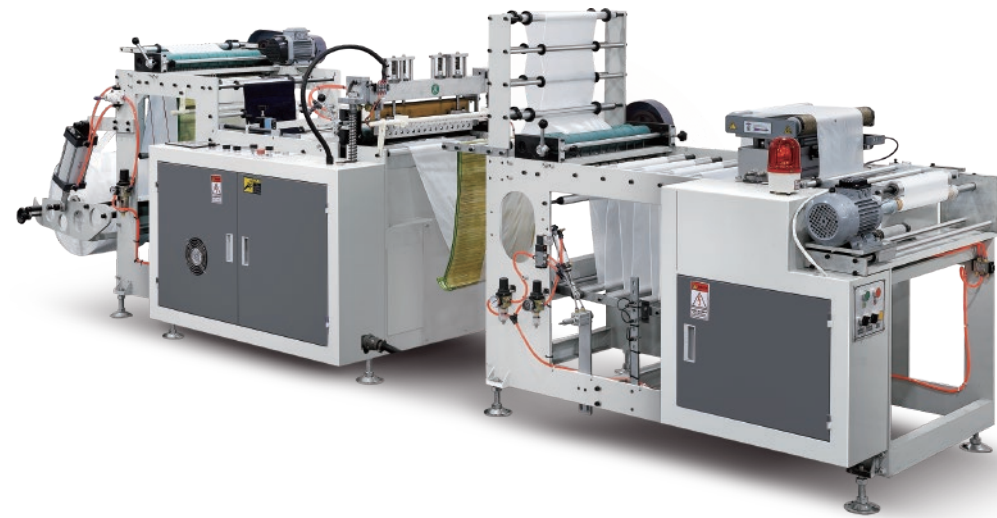

### CX-450x2

双道平口连卷袋制袋机（有芯）  
SEMI-AUTO DOUBLE LINES FLAT-ROLLING  
BAG MAKING MACHINE (WITH CORE)

| 型号      | MODEL              | CX-500          | CX-450*2         |
|---------|--------------------|-----------------|------------------|
| 适用原料    | Suitable materials | PE              | PE               |
| 制袋宽度    | Bag width          | 60-450mm        | 60-400mm         |
| 制袋长度    | Bag length         | 100-1200mm      | 100-1200mm       |
| 制袋厚度    | Bag thickness      | 0.005-0.015mm   | 0.005-0.02mm     |
| 制袋速度    | Speed              | 100-250/min     | 100-250*2/min    |
| 总功率     | Total power        | 6kw             | 8kw              |
| 外形尺寸/重量 | Dimension/Weight   | 6*1.3*1.8m/1.2T | 6*1.4*1.75m/1.5T |


## BAG MAKING MACHINE

### 宠物袋制袋机

PET BAG MAKING MACHINE  
(WITH CORE)



| 型号      | MODEL              | CX-260              |
|---------|--------------------|---------------------|
| 适用原料    | Suitable materials | PE, PBAT            |
| 制袋宽度    | Bag width          | < 235mm             |
| 制袋长度    | Bag length         | 250-450mm           |
| 制袋厚度    | Bag thickness      | 0.008-0.03mm        |
| 制袋速度    | Speed              | 150-180/mins        |
| 总功率     | Total power        | 6kw                 |
| 外形尺寸/重量 | Dimension/Weight   | 5.9*2.450*1.5m/1.2T |

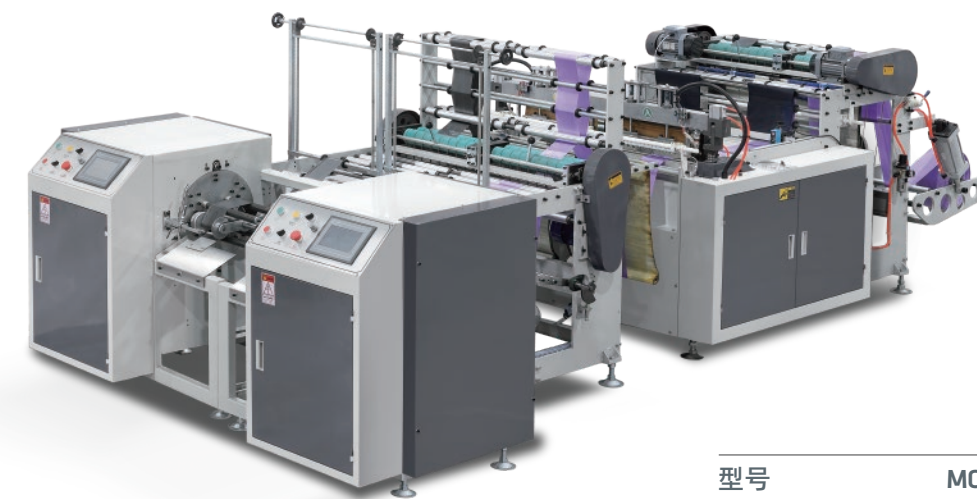

### CX-350X2

高速双道连卷八折垃圾袋制袋机  
HIGH SPEED DOUBLE LINE STAR  
BOTTOM ROLLING GARBAGE BAG  
MAKING MACHINE

| 型号      | MODEL              | CX-350*2           |
|---------|--------------------|--------------------|
| 适用原料    | Suitable materials | LDPE, HDPE         |
| 制袋宽度    | Bag width          | 300mm              |
| 制袋长度    | Bag length         | 800mm              |
| 制袋厚度    | Bag thickness      | 0.008-0.04mm       |
| 制袋速度    | Speed              | 220*2/min*2        |
| 总功率     | Total power        | 10kw               |
| 外形尺寸/重量 | Dimension/Weight   | 5.8*1.2*1.65m/1.8T |

## BAG MAKING MACHINE

### CX-1000-1200

先烫后折连卷垃圾袋制袋机  
C-FOLDING ROLLING GARBAGE  
BAG MAKING MACHINE



| 型号      | MODEL              | CX-1000           | CX-1200         |
|---------|--------------------|-------------------|-----------------|
| 适用原料    | Suitable materials | PE                | PE              |
| 制袋宽度    | Bag width          | 1000mm            | 1200mm          |
| 制袋长度    | Bag length         | 900mm             | 1100mm          |
| 制袋厚度    | Bag thickness      | 0.01-0.04mm       | 0.01-0.04mm     |
| 制袋速度    | Speed              | 30-140Pcs/min     | 20-100Pcs/min   |
| 总功率     | Total power        | 12kw              | 14kw            |
| 外形尺寸/重量 | Dimension/Weight   | 9.7*2.2*1.9m/1.8T | 9.9*2.2*1.9m/2T |



### CX-1000-1200



全自动穿绳垃圾袋制袋机  
FULLY AUTOMATIC DRAWSTRING  
GARBAGEBAG MAKING MACHINE

| 型号      | MODEL              | CX-1000           | CX-1200            |
|---------|--------------------|-------------------|--------------------|
| 适用原料    | Suitable materials | PE                | PE                 |
| 制袋宽度    | Bag width          | 1000mm            | 1200mm             |
| 制袋长度    | Bag length         | 900mm             | 1100mm             |
| 制袋厚度    | Bag thickness      | 0.01-0.04mm       | 0.01-0.04mm        |
| 制袋速度    | Speed              | 30-140Pcs/min     | 20-100Pcs/min      |
| 总功率     | Total power        | 12kw              | 14kw               |
| 外形尺寸/重量 | Dimension/Weight   | 9.5*2.2*1.8m/1.6T | 9.7*1.85*1.8m/1.8T |

## BAG MAKING MACHINE

### CX-800

单道边封（快递袋）制袋机  
SINGLE LINE SIDE SEALING  
(COURIER BAG) BAG MAKING MACHINE

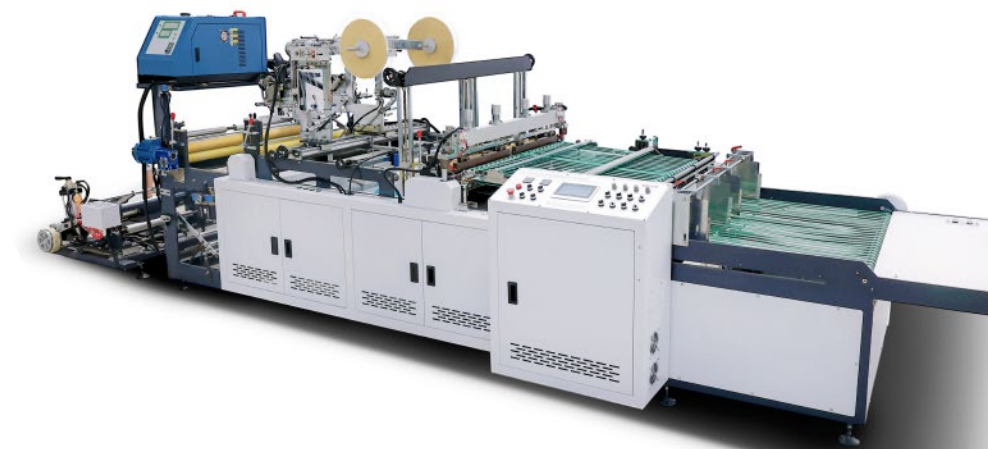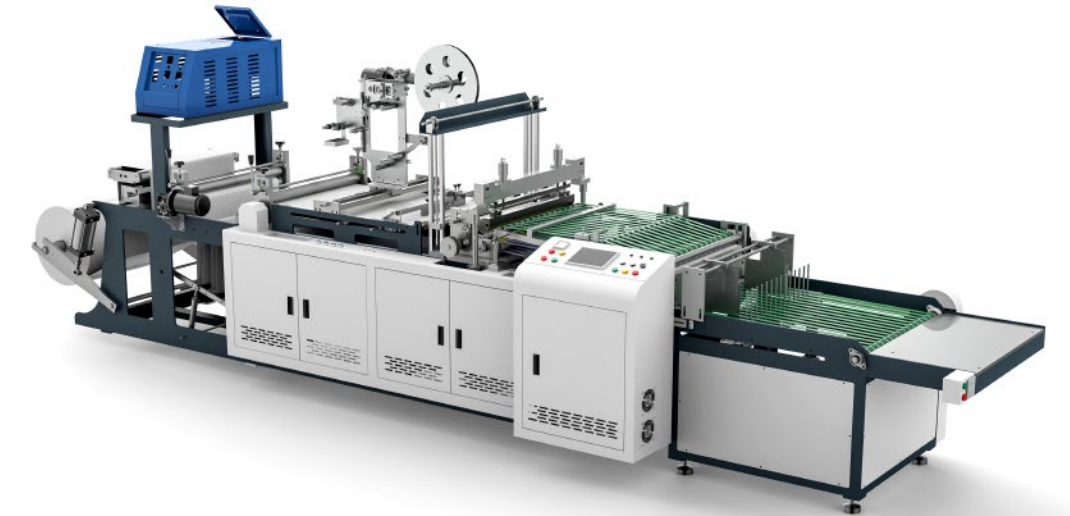

### CX-500X2

双道边封（快递袋）制袋机  
DOUBLE LINE SIDE SEALING  
(COURIER BAG) BAG  
MAKING MACHINE

| 型号      | MODEL              | CX-800                | CX-500*2              |
|---------|--------------------|-----------------------|-----------------------|
| 适用原料    | Suitable materials | LDPE, HDPE, PLA, PBAT | LDPE, HDPE, PLA, PBAT |
| 制袋宽度    | Bag width          | 700mm                 | 420mm                 |
| 制袋长度    | Bag length         | 850mm                 | 600mm                 |
| 制袋厚度    | Bag thickness      | 0.008-0.05mm          | 0.008-0.05mm          |
| 制袋速度    | Speed              | 260/min               | 250*2/min             |
| 总功率     | Total power        | 14kw                  | 18kw                  |
| 外形尺寸/重量 | Dimension/Weight   | 5.8*1.1*1.8m/1.5T     | 6.5*1.3*1.75m/2T      |


# CX-450

全自动平口连卷袋制袋机（有芯）  
FULLY AUTOMATIC FLAT-ROLLING BAG  
MAKING MACHINE (WITH CORE)



| 型号      | MODEL              | CX-450                |
|---------|--------------------|-----------------------|
| 适用原料    | Suitable materials | LDPE, HDPE, PLA, PBAT |
| 制袋宽度    | Bag width          | 400mm                 |
| 制袋长度    | Bag length         | 800mm                 |
| 制袋厚度    | Bag thickness      | 0.008-0.04mm          |
| 制袋速度    | Speed              | 200-350Pcs/Min        |
| 总功率     | Total power        | 18kw                  |
| 外观尺寸/重量 | Dimension/Weight   | 6.5*1.2*1.8m/2T       |

高速卫星柔板印刷机  
HIGH SPEED FLEXO PRINTING MACHINE

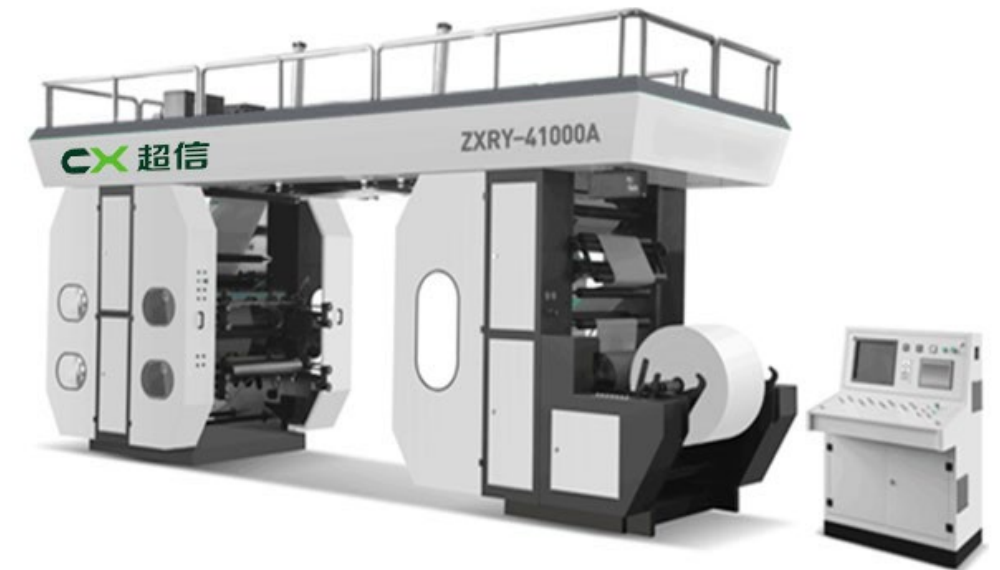

| 型号      | MODEL                  | CX-1000         |
|---------|------------------------|-----------------|
| 印刷周长    | Printing circumference | 350-850mm       |
| 套印精度    | Registration accuracy  | 横向±0.2, 纵向±0.2  |
| 印刷宽度    | Printing width         | 990mm           |
| 最大过料宽度  | Maximum feeding width  | 1030mm          |
| 印刷速度    | Printing speed         | 10-200米/秒       |
| 总功率     | Total power            | 40kw/h          |
| 外观尺寸/重量 | Dimension/Weight       | 8*2.5*2.5m/7.5T |



电脑凹版印刷机  
GRAVURE PRINTING MACHINE

| 型号      | MODEL                  | CX-800         |
|---------|------------------------|----------------|
| 印刷周长    | Printing circumference | 300-650mm      |
| 套印精度    | Registration accuracy  | 横向±0.2, 纵向±0.2 |
| 印刷宽度    | Printing width         | 790mm          |
| 最大过料宽度  | Maximum feeding width  | 830mm          |
| 印刷速度    | Printing speed         | 10-200米/秒      |
| 总功率     | Total power            | 120kw/h        |
| 外观尺寸/重量 | Dimension/Weight       | 8*2.5*2.5m/7T  |






















柔板两色/四色印刷机  
TWO/FOUR-COLOR HIGH SPEED  
FLEXO PRINTING MACHINE

| 型号      | MODEL                  | CX-1200         |
|---------|------------------------|-----------------|
| 印刷周长    | Printing circumference | 350-1050mm      |
| 套印精度    | Registration accuracy  | 横向±0.2, 纵向±0.2  |
| 印刷宽度    | Printing width         | 1190mm          |
| 最大过料宽度  | Maximum feeding width  | 1230mm          |
| 印刷速度    | Printing speed         | 10-200米/秒       |
| 总功率     | Total power            | 40kw/h          |
| 外观尺寸/重量 | Dimension/Weight       | 8*2.7*2.5m/7.5T |

# 选配设备

## OPTIONAL DEVICES

|   |  |   |   |
|---|--|---|---|
| <p>上旋转<br/>Oscillating tower</p>                       | <p>自动纠偏/测厚<br/>EPC system/Thickness Gauge</p>               | <p>自动旋转风环<br/>Rotary Air Ring</p>                        |   |
| <p>多组份喂料系统<br/>Multi-component dosing system</p>       | <p>三组份喂料系统<br/>Triple component lost-in-weight feeder</p>   | <p>单组份喂料系统<br/>Single component lost-in-weight feeder</p>  | <p>米克重<br/>Meter Weight Control</p>              |
| <p>液压换网<br/>Hydraulic screen changer</p>             | <p>快速换网<br/>Quick type screen changer</p>                 | <p>手动换网<br/>Manual Screen Changer</p>                   | <p>气胀轴<br/>Air shaft</p>                       |
| <p>螺杆式空压机<br/>Screw-type air compressor</p>          | <p>水冷机<br/>Chiller</p>                                    | <p>自动拌料机<br/>Automatic mixer</p>                         | <p>二次插边架<br/>Secondary side gusset device</p>  |
| <p>自动双收卷 (PLC)<br/>Automatic double winder(PLC)</p>  | <p>排辊双收卷(PLC)<br/>Row roller type double winder(PLC)</p>  | <p>摩擦单收卷(PLC)<br/>Automatic single winder (PLC)</p>     | <p>中心收卷<br/>Central type winder</p>            |

# 战略合作伙伴

## STRATEGIC PARTNERS

|   |   |   |   |
|---|---|---|---|
|    |    |    |    |
|    |    |    |    |
|   |   |   |   |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |



我们的精神


高效、突破、双赢


OUR SPIRIT

Efficiency, Breakthrough, Win-win

# 全球化定位、本土化运营

## GLOBALIZED POSITIONING AND LOCALIZED OPERATION

 **3000+客户**  
3000+customers

 **89+国家**  
89+countries

 **私人订制**  
PERSONALIZED

专业技术团队厂房规划，私人方案定制。  
CHAOXIN professional technical team customize private solution for the layout of customers' workshop

 **解决方案**  
SOLUTION

成本利润核算，以及提供多种配方方案。  
Cost and profit accounting, and providing a variety of formula solutions.

 **售后服务**  
AFTER-SALES SERVICE

售后（质保三年）。  
After-sales service (three-year warranty).

 **安装调试**  
INSTALLATION AND DEBUGGING

全球免费安装调试，技术指导，终身维护。  
Global free installation and commissioning, technical guidance, and lifelong maintenance.



### 我们的使命

与我们的客户一起促进和塑造优质生产技术的发展，  
通过高素质和积极进取的员工提供具有卓越精度和可靠性的解决方案和服务。

### OUR MISSION

Work with our customers to promote and shape the development of high-quality production technologies.  
CHAOXIN high-quality and proactive employees will provide solutions and services with excellent accuracy and reliability.