

浙江超信机械科技有限公司
Zhejiang Chaoxin Machinery Technology Co., Ltd.


地址：浙江省温州市平阳县万全工业区兴隆路118号
国内总业务热线：13706889719
华南地区：13758833636
华北地区：13695837878 华中地区：13676537676
西南地区：13868503439 西北地区：13867736682
邮箱：cxmachinery@zjchaoxin.com

Add: NO.118 XingLong Road, Wanquan Industrial Zone,
Pingyang, Wenzhou, Zhejiang, P.R.,CHINA
Mob: +86-13958915221
E-mail: cxmachinery@zjchaoxin.com
Whatsapp/Wechat: +86-13958915221



**ONE-STOP SOLUTION
FOR FILM BLOWING, PRINTING
& BAG-MAKING EQUIPMENT**

吹膜 印刷 制袋设备一站式解决方案

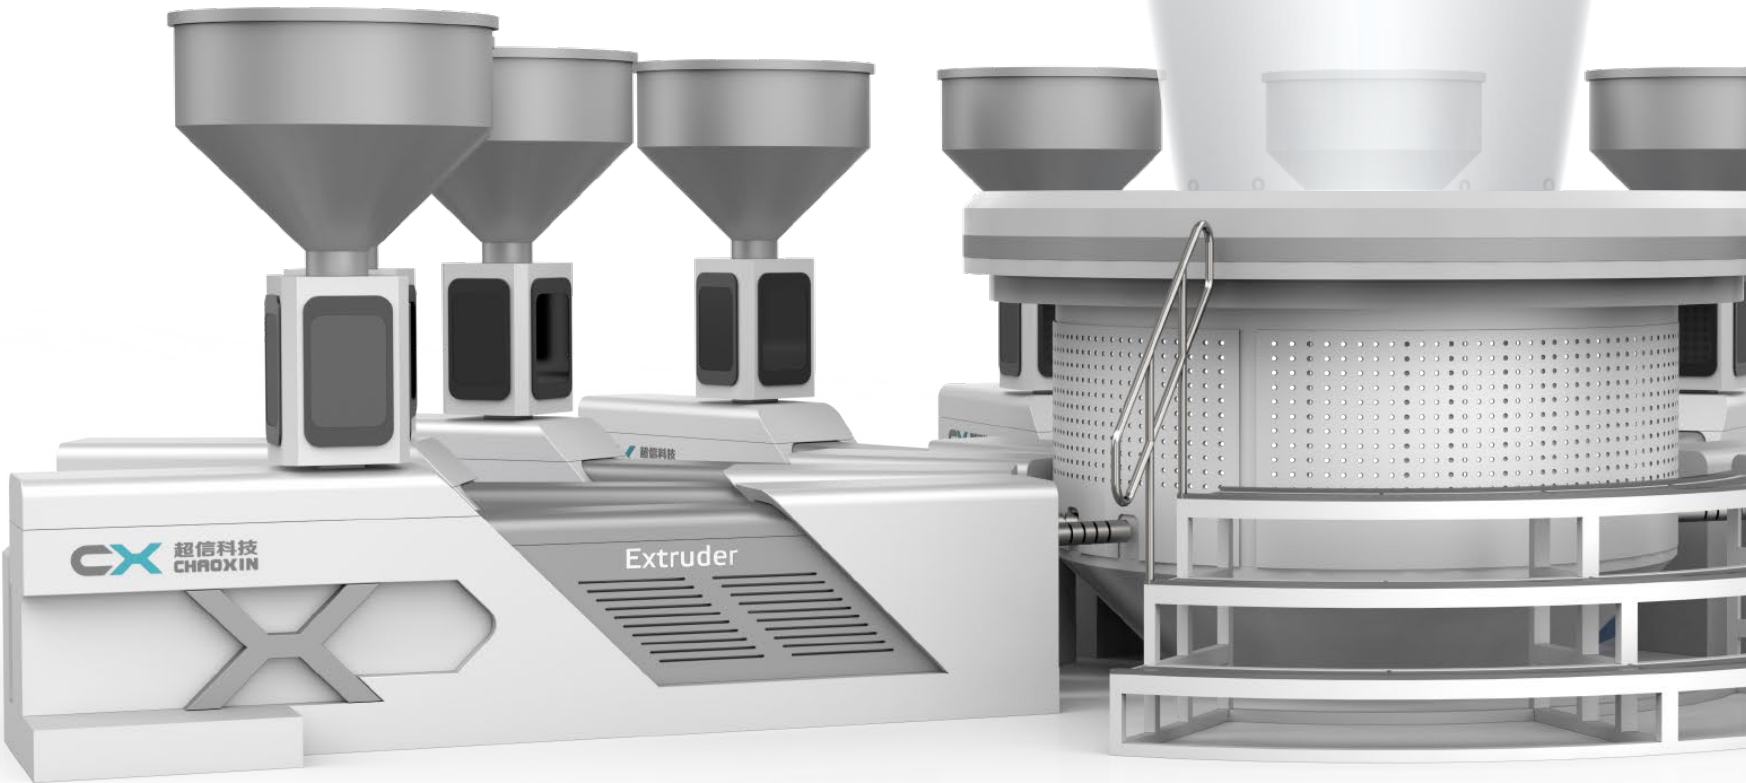

创新科技，定义薄膜未来。
INNOVATIVE TECHNOLOGY
DEFINES THE FUTURE OF THE FILMS

总部工厂
Headquarters Factory

城市展厅
City Exhibition Hall

市中心办公楼
Downtown Office Building



COMPANY PROFILE
企业简介

01-10

APPLICATIONS
应用领域

11-14

FILM BLOWING MACHINE SERIES
吹膜机系列

15-30

BAG MAKING MACHINE SERIES
制袋机系列

31-40

PRINTING MACHINE AND OTHERS
印刷机及其他

41-42

OPTIONAL LIST
选配清单

43-44

智能车间，定义制造新标杆。

SMART WORKSHOP, DEFINING A
NEW BENCHMARK FOR MANUFACTURING.



创立于2018年的浙江超信机械科技有限公司，专注于塑料包装机械的研发与制造，主营产品包括吹膜机、制袋机及相关配套设备。公司位于中国塑机重镇—浙江瑞安，厂区占地面积逾90亩，拥有现代化标准厂房及办公楼超5万平方米，现有员工200余人。公司集研发、生产、销售、服务于一体，致力于为全球客户提供智能、高效、可靠的塑料包装解决方案。

Zhejiang Chaoxin Machinery Technology Co., Ltd., founded in 2018, focuses on the research and development and manufacturing of plastic packaging machinery. Its main products include film blowing machines, bag making machines and related supporting equipment. The company is located in Ruian, Zhejiang, a major plastic machinery town in China. The factory covers an area of more than 90 acres, with modern standard factory buildings and office buildings of more than 50,000 square meters, and currently has more than 200 employees. The company integrates R&D, production, sales and services, and is committed to providing global customers with intelligent, efficient and reliable plastic packaging solutions.



2014年，成立温州正信机械有限公司，从事包装设备机械；塑料加工专用设备制造。Wenzhou Zhengxin Machinery Co., Ltd. was established to engage in packaging equipment and machinery.

批量生产ABA吹膜机，增加印刷设备制造。Mass production of film blowing machines and printing equipment manufacturing.

批量生产三层共挤吹膜机。Mass production of three-layer co-extrusion film blowing machine.

建立全生物降解研发部门。Establish a fully biodegradable R&D department.

成立浙江超信机械科技有限公司，专研生产全生物降解吹膜设备。Zhejiang Chaoxin Machinery Technology Co., Ltd. was established, specializing in the production of high-speed film blowing equipment.

全生物降解吹膜设备进入海南市场，同年被各大企业采购。Fully biodegradable film blowing equipment entered the market and was purchased by major companies in the same year.

全生物降解吹膜机不断研发投入，使每小时产量大幅领先同行。With continuous investment in research and development of high-speed film blowing machines, the output per hour has been significantly ahead of its peers.

厂房变更扩建为90余亩现代化标准厂房，同行业中占地面积位列前茅。The modern standard factory building covering an area of 90 acres is put into use, and the second phase of the factory is planned to cover 200 acres.

成立浙江超正进出口贸易有限公司，从事出口贸易，深耕高精密进口贸易；同年成立温州市超正文化传媒有限公司，创新自媒体宣传，打造网红文化。Zhejiang Chaozheng Import and Export Trading Co., Ltd. was established to expand export trade and deepen high-precision import trade.

未来规划200余亩.....Reached technical alliances with various friends and expanded the new factory for around 200 acres in the second phase.

创始人故事

THE FOUNDER STORY

Eason Fan is chief executive officer (CEO) of the CHAOXIN Machinery Technology CO.,LTD and chairman of the executive board of Zhejiang CHAOXIN Technology CO.,LTD.

Eason Fan has been engaged in the plastic packaging industry for 18 years, from a technical engineer to a sales champion, and then to the founder of CHAOXIN brand. His knowledge of plastic raw materials and plastic packaging machinery has reached the level of a senior expert, and he is now an honorary expert of China Plastics Industry Association.

EASON FAN

Chief executive officer



超越自我 信守未来
Beyond Yourself
Keep the Future

LEO CHEN

Chief Marketing Officer



Leo Chen is chief Marketing officer (CMO) of the CHAOXIN Machinery Technology CO.,LTD and member of the executive board of Zhejiang CHAOXIN Technology CO.,LTD.

Leo Chen has been in the plastic packaging industry for 10 years and is responsible for the brand positioning of Chaoxin Machinery Technology. He has a deep understanding of the development of the global plastic packaging industry.

战略合作伙伴 STRATEGIC PARTNERS



专利证书 PATENT CERTIFICATE



20+

发明专利
Invention Patent

65+

实用新型专利
Utility Model Patent

吹膜机行业标准主起草单位

Main Drafting Unit of Industry Standards for Film Blowing Machines

6S 精益生产

6S LEAN PRODUCTION



我们工厂全面推行并深化6S管理, 这不仅是一套标准化的现场管理工具, 更是我们提升核心竞争力、塑造卓越企业文化的核心引擎。

Our factory has fully implemented and deepened 6S management, which is not only a set of standardized on-site management tools, but also the core engine for us to enhance our core competitiveness and shape an excellent corporate culture.



应用领域 APPLICATIONS



01 食品包装 Food Packaging

食品包装袋、自封袋、冷冻袋
Food Packaging Bags, Self-sealing
Bags, Freezer Bags



02 农业 Agriculture

大棚膜、地膜
Greenhouse Film, Mulching Film



03 医疗包装 Medical Packaging

医用耗材包装、医疗垃圾袋、一次性
医用手套、医用影像袋
Medical blister packaging
(HDPE transparent film)



04 日用品包装 Daily Necessities Packaging

背心袋、垃圾袋、平口袋、超市散称袋
T-shirt Bag, Garbage Bag, Flat Bag,
Super Market Rolling Bag



05 工业包装 Industrial Packaging

家具防护膜、纺织品包装、电子产品
包装、建材防护膜
Furniture Protective Film, Textile
Packaging, Electronic Packaging,
Building Materials Protective Film





效率即是绿色
EFFICIENCY IS GREEN



专注于塑料机械解决方案
FOCUS ON PLASTIC
MACHINERY SOLUTIONS

PERFORMANCE MAX

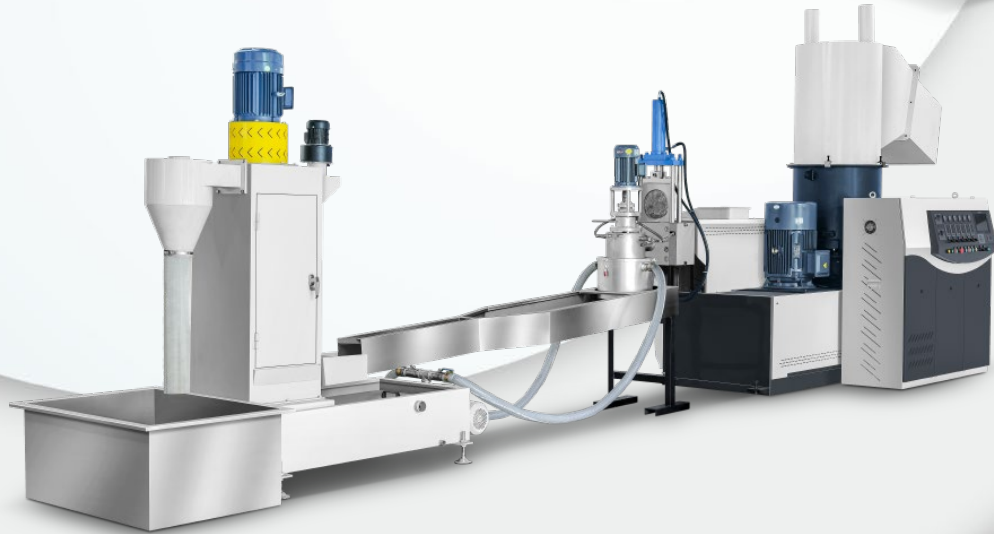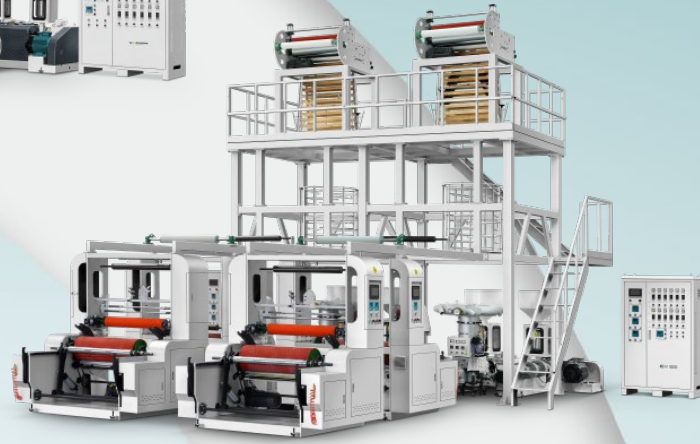

持续不断创新, 才能赢得更多期待
Continuous Innovation Is The Key To Earn More Expectations

定制化的解决方案

为您的生产需求量身定做, 提供高效、
极具性价比的生产方案。


TAILORED SOLUTIONS

Customized efficient and cost-effective
production solutions

CX-5S-2300

五层共挤吹膜机 (IBC系统)
FIVE-LAYER CO-EXTRUSION FILM BLOWING MACHINE
(WITH IBC SYSTEM)

型号	MODEL	CX-5S-2300(WITH IBC)
适用原料	Suitable Materials	LDPE, LLDPE, MLLDPE, MDPE
产品宽度	Film Width	2100mm
产品厚度	Film Thickness	0.03-0.15mm
最大挤出量	Max Extrusion Output	400KG/H
螺杆直径	Screw Diameter	60mm*5
螺杆长径比	Screw L/D	32:1
齿轮箱	Gear Box	250*5
主机功率	Main Motor	55KW*5 SERVO MOTOR
风机功率	Air Blower	22KW*1/11KW*2
总功率	Total Power	500KW
模口大小	Die Head	500mm
牵引辊宽度	Roller Width	2300mm
外形尺寸/重量	Dimension/Weight	20*8.5*14.5m/25T

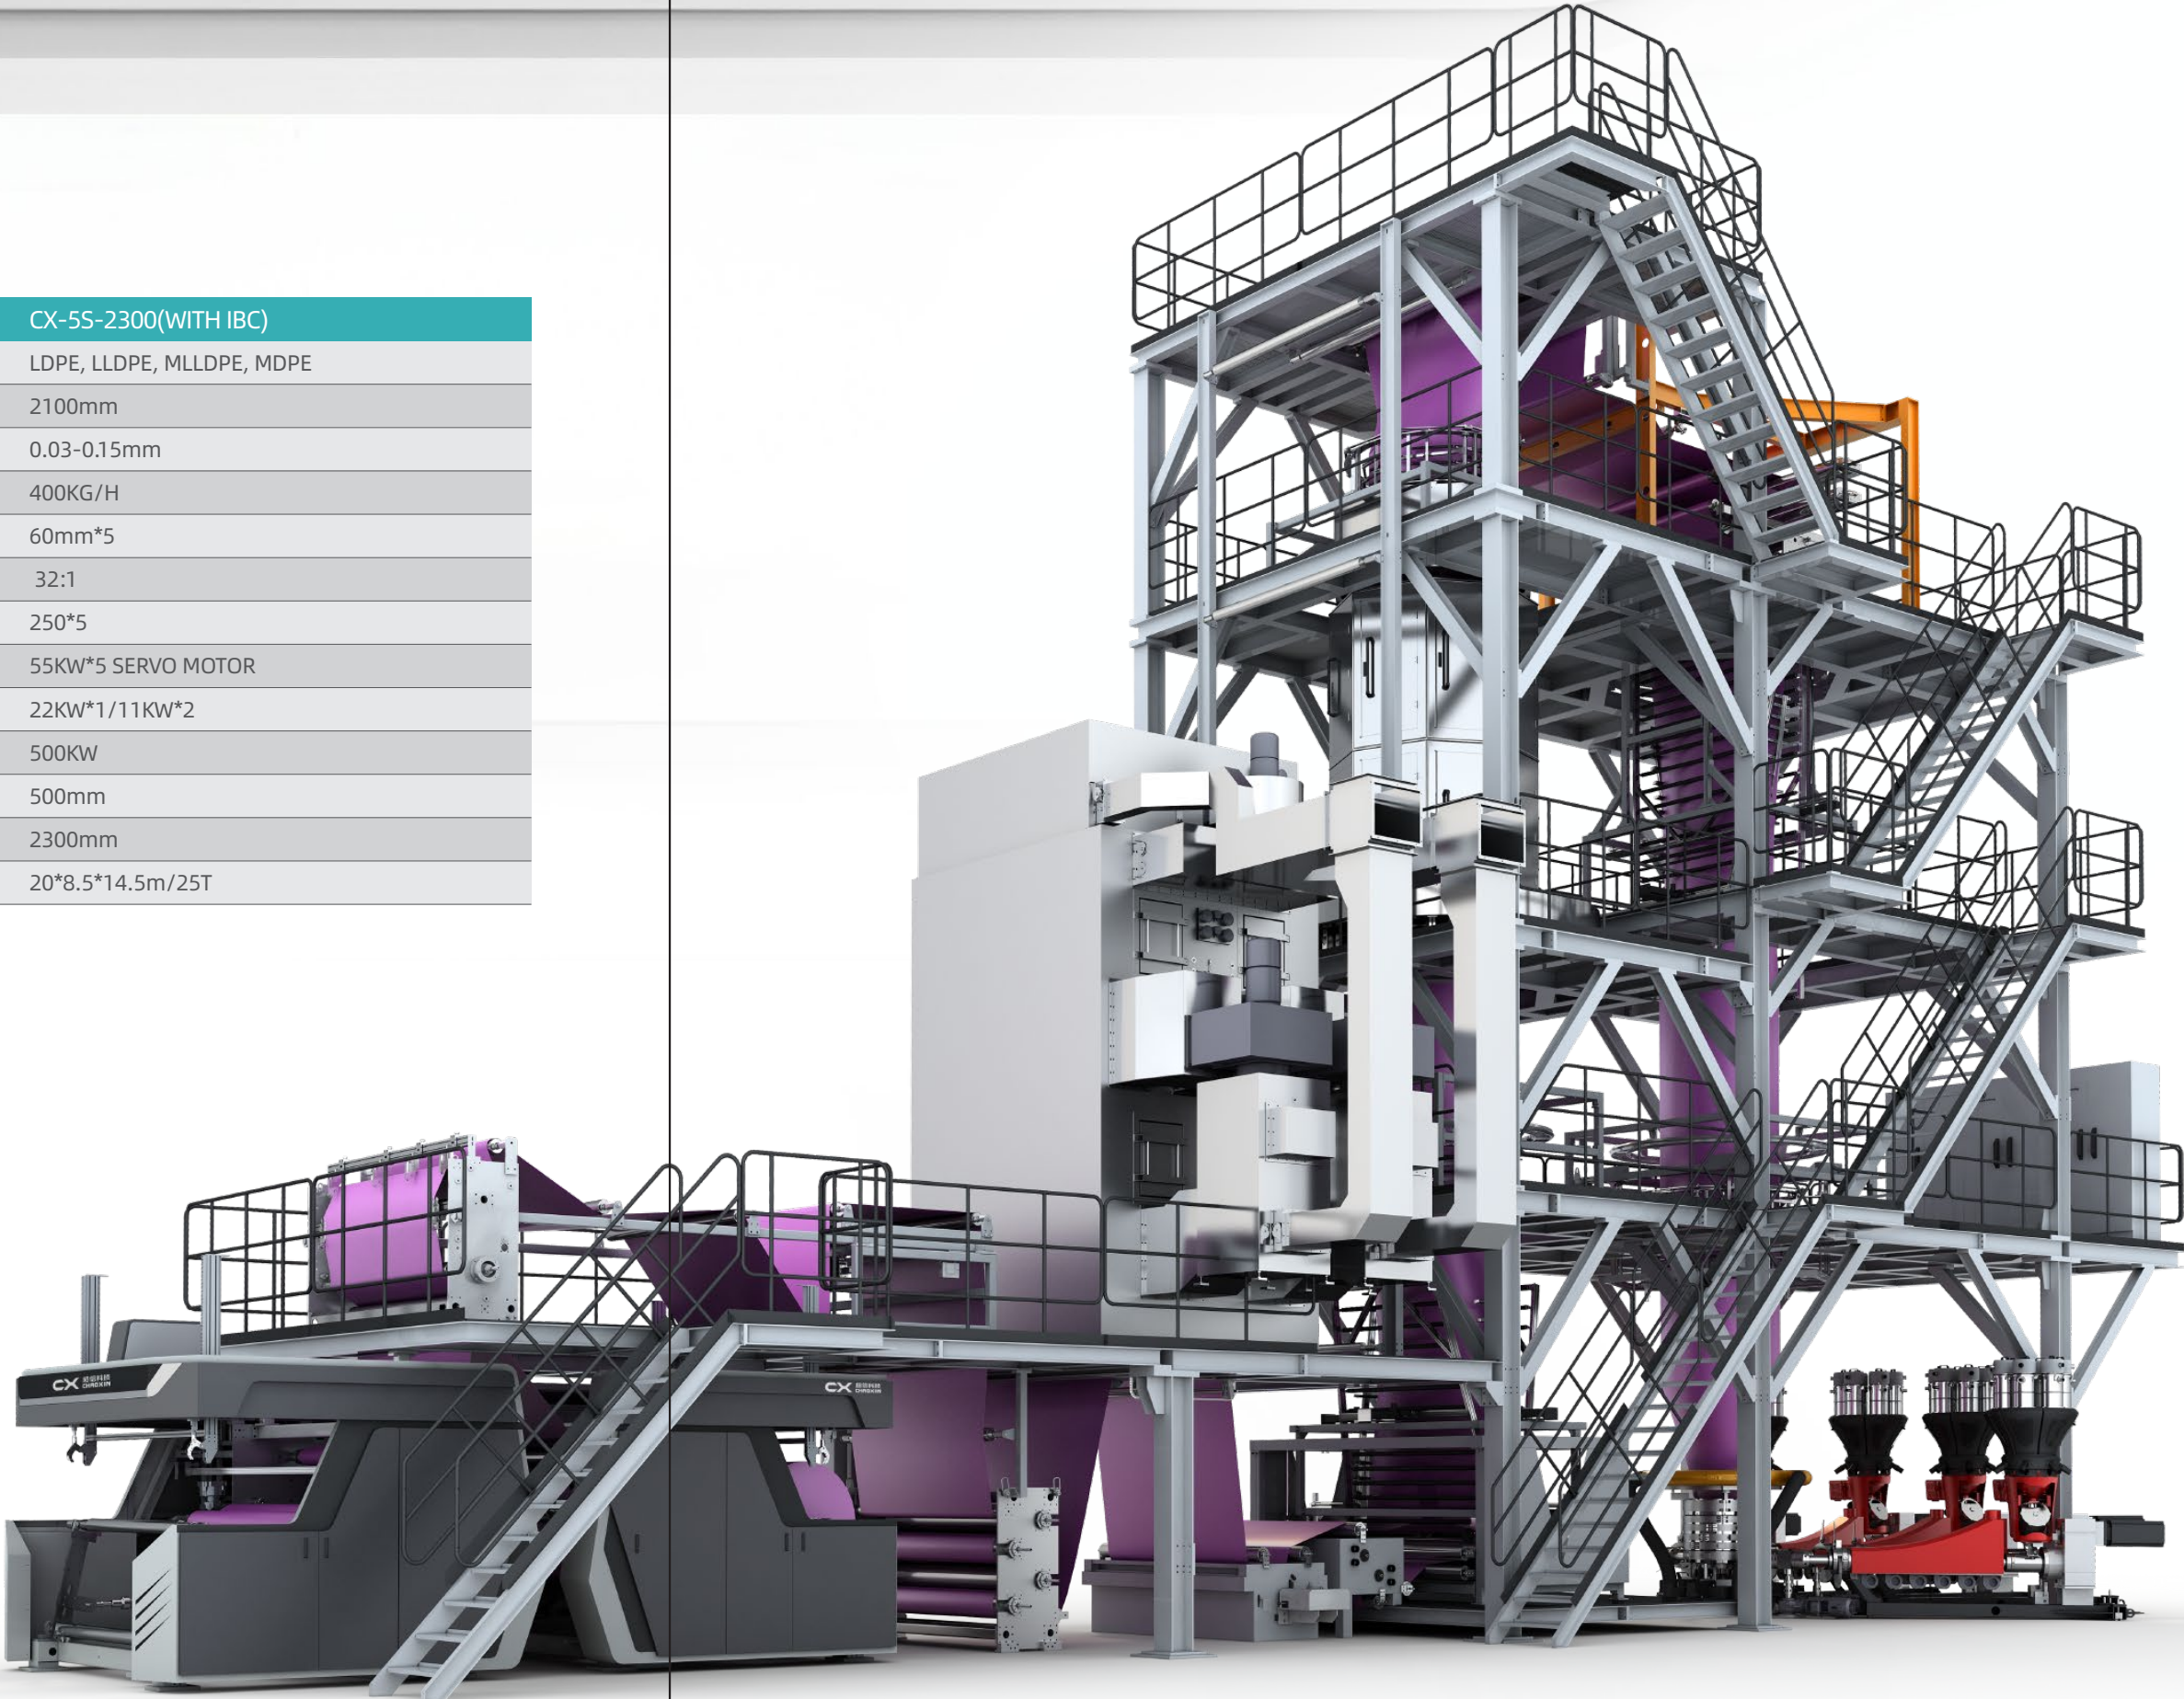


CX-ABC-900-1300

ABC三层共挤上旋吹膜机 (IBC系统)

ABC THREE-LAYER CO-EXTRUSION OSCILLATING TOWER FILM BLOWING MACHINE(WITH IBC SYSTEM)




上旋转
Oscillating Tower

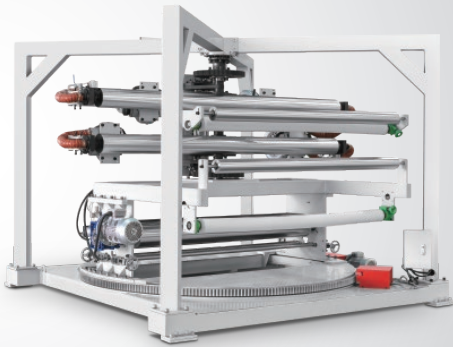

电动稳泡圈
Electric Bubble Stabilizer



电晕机
Corona Treatment

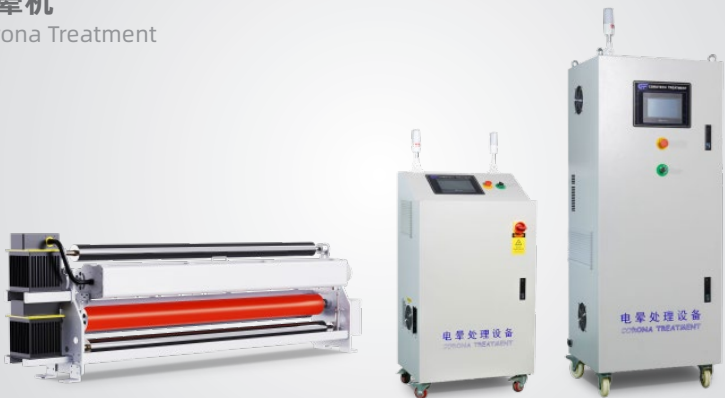

摩擦单收卷(PLC)
Automatic Single Winder (PLC)



型号	MODEL	CX-ABC-900(WITH IBC)	CX-ABC-1100(WITH IBC)	CX-ABC-1300(WITH IBC)
适用原料	Suitable Materials	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA
产品宽度	Film Width	400-800mm	600-1000mm	800-1200mm
产品厚度	Film Thickness	0.02-0.15mm	0.02-0.15mm	0.02-0.15mm
最大挤出量	Max Extrusion Output	150KG/H	170KG/H	200KG/H
螺杆直径	Screw Diameter	45mm/50mm/45mm	50mm/55mm/50mm	55mm/65mm/55mm
螺杆长径比	Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱	Gear Box	146*2/173*1	173*2/180*1	180*2/200*1
主机功率	Main Motor	18.5/22/18.5KW	22/30/22KW	30/37/30KW
风机功率	Air Blower	5.5KW*1/4KW*2	7.5KW*1/5.5KW*2	11KW*1/5.5KW*2
总功率	Total Power	100KW	130KW	170KW
模口大小	Die Head	200mm	250mm	280mm
牵引辊宽度	Roller Width	900mm	1100mm	1300mm
外形尺寸/重量	Dimension/Weight	6.5*5*6.2m/7T	7*5*6.8m/8T	8*5.5*7.2m/9T

CX-ABC-1600-2500

ABC三层共挤上旋吹膜机 (IBC系统)


ABC THREE-LAYER CO-EXTRUSION OSCILLATING
TOWER FILM BLOWING MACHINE
(WITH IBC SYSTEM)

型号	MODEL	CX-ABC-1600(WITH IBC)	CX-ABC-2100(WITH IBC)	CX-ABC-2500(WITH IBC)
适用原料	Suitable Materials	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA
产品宽度	Film Width	1000-1500mm	1300-1900mm	1700-2300mm
产品厚度	Film Thickness	0.02-0.15mm	0.02-0.15mm	0.02-0.15mm
最大挤出量	Max Extrusion Output	240KG/H	350KG/H	400KG/H
螺杆直径	Screw Diameter	60mm/65mm/60mm	65mm/75mm/65mm	75mm/85mm/75mm
螺杆长径比	Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱	Gear Box	180*2/200*1	200*2/225*2	225*2/250*1
主机功率	Main Motor	30/37/30KW	37/45/37KW	45/55/45KW
风机功率	Air Blower	11KW*1 5.5KW*2	11KW*1 5.5KW*2	15KW*1 7.5KW*2
总功率	Total Power	180KW	220KW	270KW
模口大小	Die Head	350mm	500mm	600mm
牵引辊宽度	Roller Width	1600mm	2100mm	2500mm
外形尺寸/重量	Dimension/Weight	8*5.5*8.5m/15T	9*6.5*10.5m/20T	10*10.5*11.5m/25T



CX-AB-1300-2200

AB农用地膜吹膜机
AB TWO-LAYER AGRICULTURAL MULCHING
FILM BLOWING MACHINE

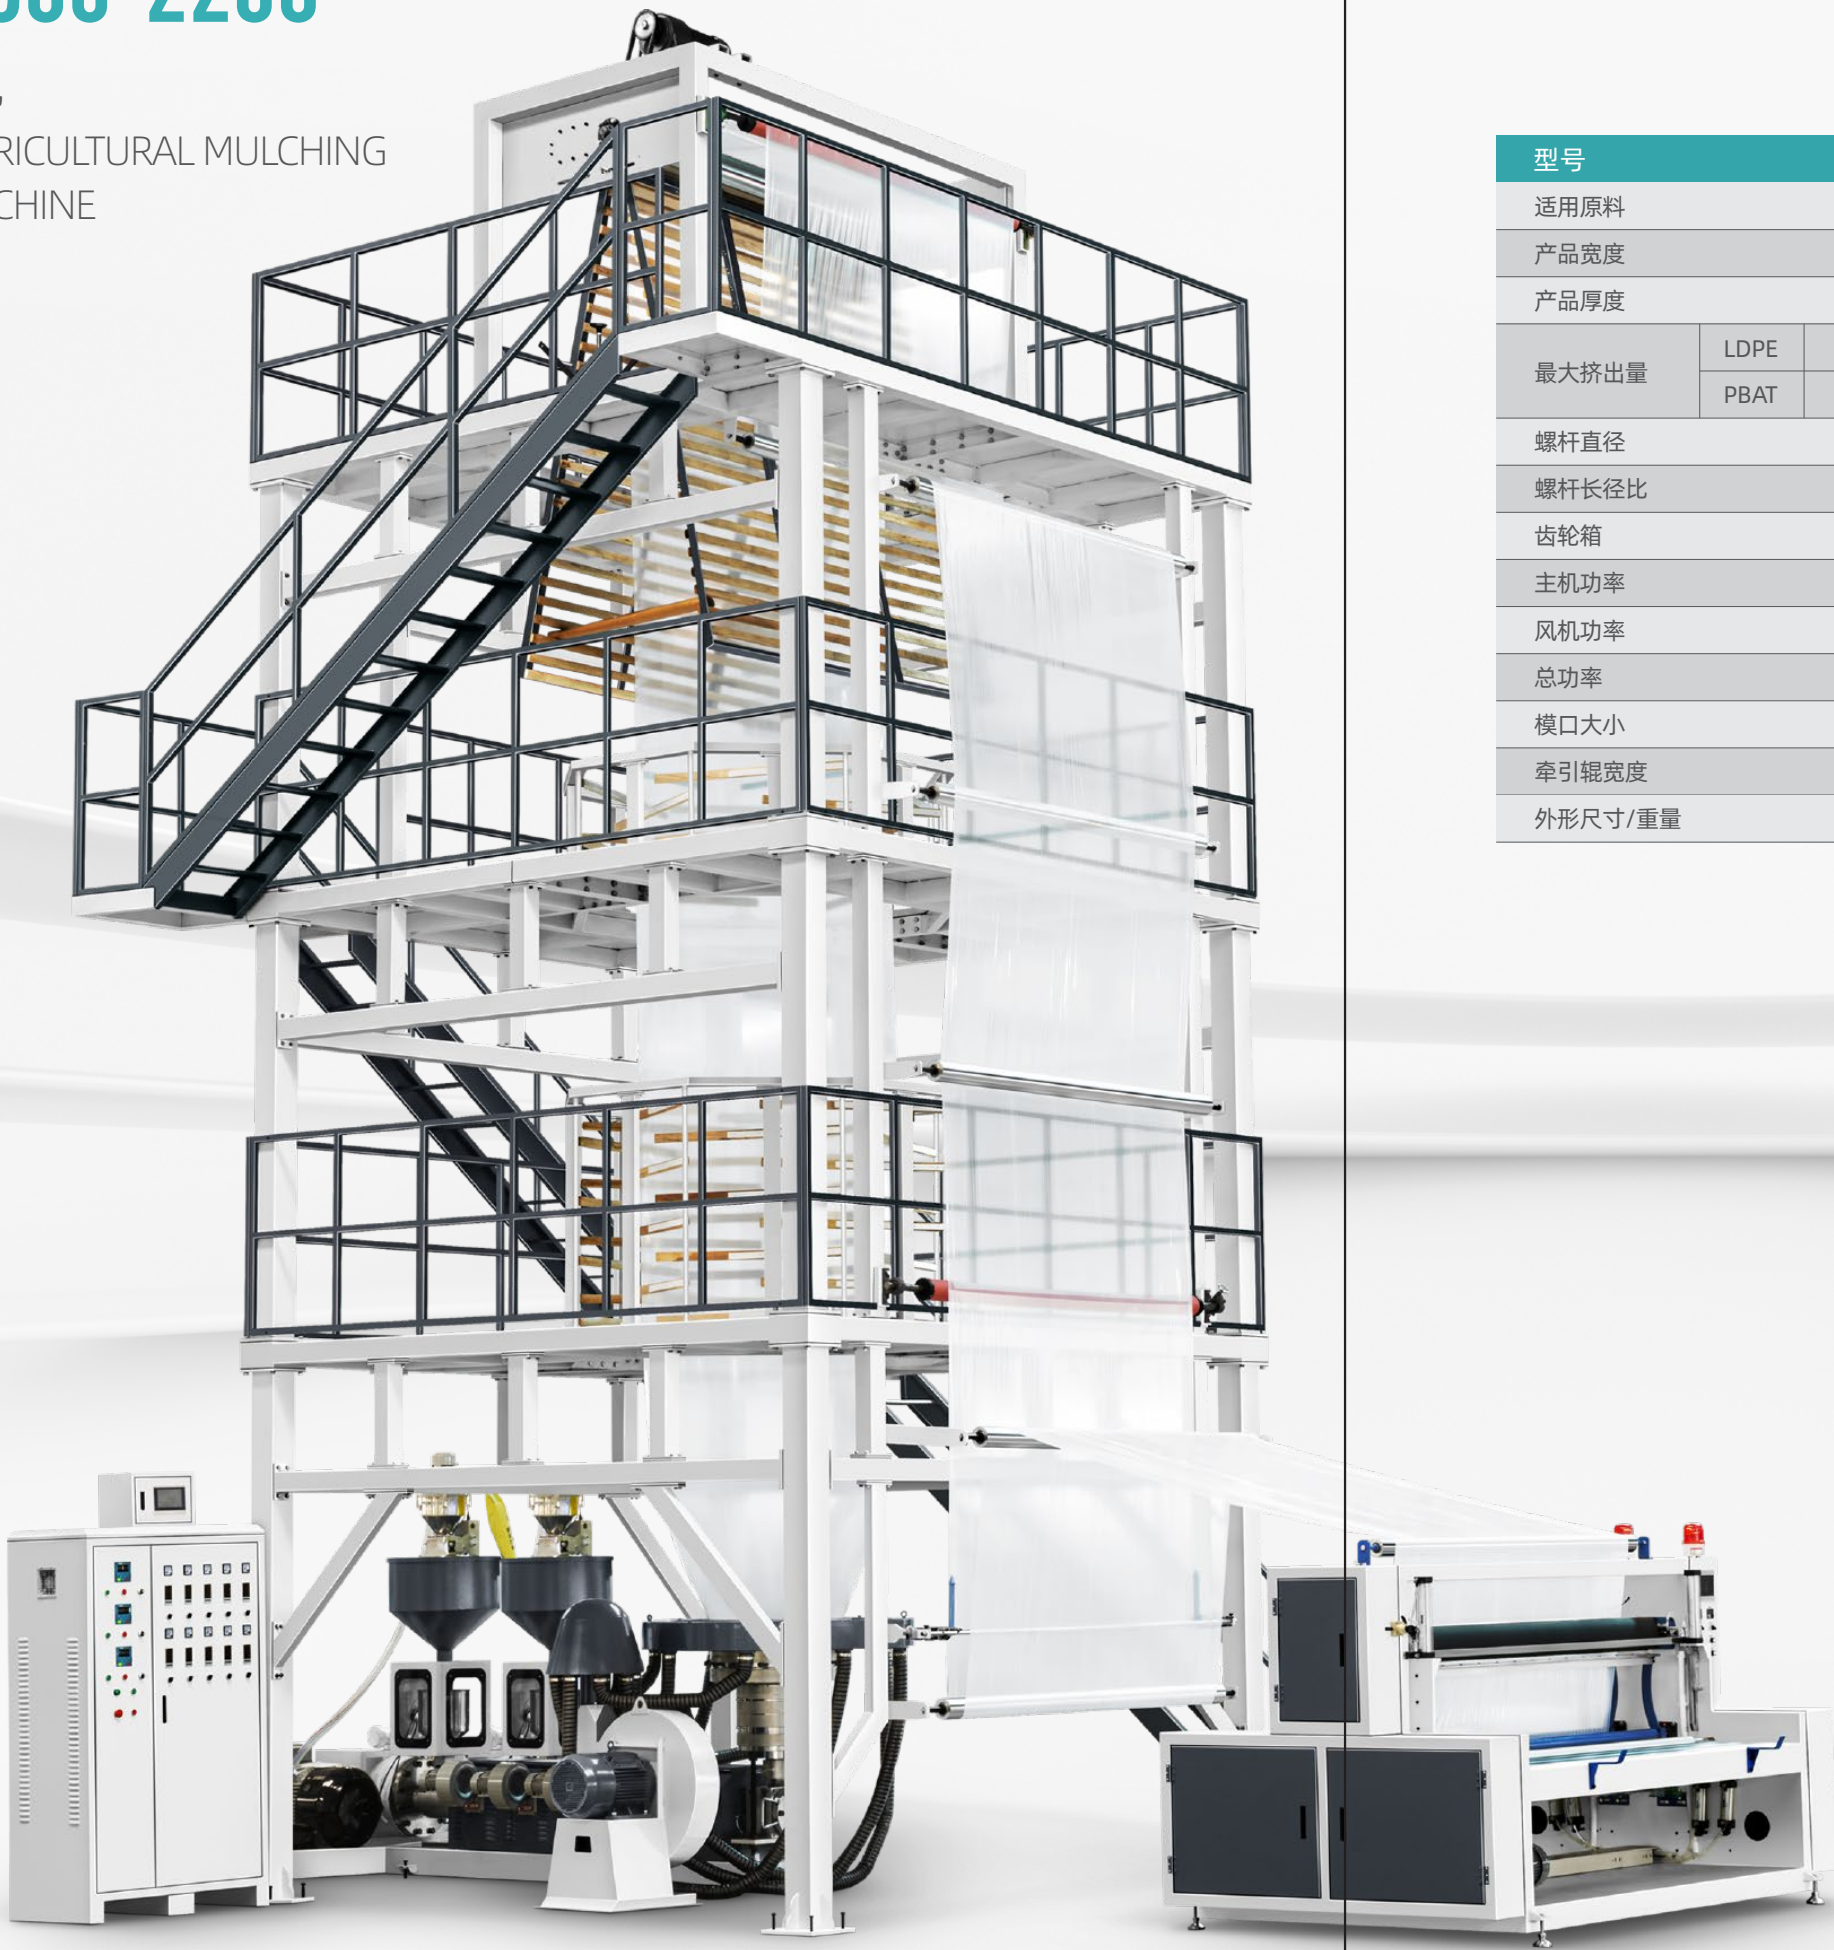

型号		MODEL	CX-AB-1300	CX-AB-1700	CX-AB-2200
适用原料		Suitable Materials	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA
产品宽度		Film Width	800-1200mm	1000-1600mm	1200-2000mm
产品厚度		Film Thickness	0.006-0.03mm	0.006-0.03mm	0.006-0.03mm
最大挤出量	LDPE	Max Extrusion Output	150KG	160KG	220KG
	PBAT	Max Extrusion Output	180KG	200KG	260KG
螺杆直径		Screw Diameter	60mm*2	65mm*2	70mm*2
螺杆长径比		Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱		Gear Box	180*2	200*2	200*2
主机功率		Main Motor	22KW*2	30KW*2	37KW*2
风机功率		Air Blower	5.5KW	7.5KW	11KW
总功率		Total Power	85KW	110KW	135KW
模口大小		Die Head	250mm	350mm	450mm
牵引辊宽度		Roller Width	1300mm	1700mm	2200mm
外形尺寸/重量		Dimension/Weight	6*4.5*6.8m/5.5T	6*5.5*7.2m/6.5T	7*6.5*9.5m/8T



打孔装置
Punching device



CX-ABC-1300-2200

ABC三层共挤吹膜机
ABC THREE-LAYER CO-EXTRUSION
FILM BLOWING MACHINE



型号	MODEL	CX-ABC-1300	CX-ABC-1600	CX-ABC-2200
适用原料	Suitable Materials	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA	LDPE, LLDPE, PBAT+PLA
产品宽度	Film Width	800-1200mm	1000-1500mm	1500-2000mm
产品厚度	Film Thickness	0.02-0.15mm	0.02-0.15mm	0.02-0.15mm
最大挤出量	Max Extrusion Output	180KG/H	220KG/H	280KG/H
螺杆直径	Screw Diameter	55mm/60mm/55mm	60mm/65mm/60mm	65mm/75mm/65mm
螺杆长径比	Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱	Gear Box	180*3	180*2/200*1	200*2/225*1
主机功率	Main Motor	22/30/22KW	30/37/30KW	37/45/37KW
风机功率	Air Blower	7.5KW	7.5KW	11KW
总功率	Total Power	130KW	180KW	230KW
模口大小	Die Head	280mm	350mm	500mm
牵引辊宽度	Roller Width	1300mm	1600mm	2200mm
外形尺寸/重量	Dimension/Weight	8*5.5*6.8m/7.5T	8.5*6.5*7.8m/8.5T	9*7.5*9.5m/10T

CX-ABA-1100-1600

全自动高速ABA高低压吹膜机（集成系统）
HIGH SPEED AUTOMATIC ABA LAYERS
LDPE/HDPE FILM BLOWING MACHINE
(INTEGRATED SYSTEM)



型号	MODEL	CX-ABA-1100	CX-ABA-1300	CX-ABA-1600
适用原料	Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度	Film Width	500-1000mm	600-1200mm	1000-1500mm
产品厚度	Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output	100KG	120KG
	LDPE	Max Extrusion Output	120KG	150KG
螺杆直径	Screw Diameter	50mm*2/55mm*2	55mm*2/60mm*2	60mm*2/65mm*2
螺杆长径比	Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱	Gear Box	173*2	180*2	200*2
主机功率	Main Motor	18.5KW*2	22KW*2	30KW*2
风机功率	Air Blower	5.5KW	7.5KW	7.5KW
总功率	Total Power	70KW	80KW	110KW
模口大小	HDPE	Die Head	100mm	120mm
	LDPE	Die Head	250mm	280mm
牵引辊宽度	Roller Width	1100mm	1300mm	1600mm
外形尺寸/重量	Dimension/Weight	6*5.5*7.2m/6T	6.5*5.5*7.2m/7T	7*6*8.5m/8T

CX-ABA-900-1300

ABA双排高速吹膜机（PLC自动换卷）

ABA TWIN UNITS LDPE/HDPE HIGH SPEED
AUTOMATIC FILM BLOWING MACHINE
(WITH AUTOMATIC PLC WINDER)



型号		MODEL	CX-ABA-900*2	CX-ABA-1100*2	CX-ABA-1300*2
适用原料		Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度		Film Width	400-800mm	500-1000mm	600-1200mm
产品厚度		Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output	170KG	200KG	240KG
	LDPE	Max Extrusion Output	200KG	260KG	320KG
螺杆直径		Screw Diameter	50mm*4/45mm*4	55mm*4/50mm*4	60mm*4/55mm*4
螺杆长径比		Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱		Gear Box	146*4	173*4	180*4
主机功率		Main Motor	15KW*4	18.5KW*4	22KW*4
风机功率		Air Blower	5.5KW*2	7.5KW*2	7.5KW*2
总功率		Total Power	110KW	130KW	160KW
模口大小	HDPE	Die Head	80mm*2	100mm*2	120mm*2
	LDPE	Die Head	180mm*2	250mm*2	280mm*2
牵引辊宽度		Roller Width	900mm	1100mm	1300mm
外形尺寸/重量		Dimension/Weight	8.5*6*5.2m/8T	8.5*6.5*6.2m/10T	8.5*7*6.8m/13T

CX-ABA-700-1100

ABA高速高低压吹膜机（PLC自动换卷）

ABA LDPE/HDPE HIGH SPEED
FILM BLOWING MACHINE
(WITH AUTOMATIC PLC WINDER)



型号		MODEL	CX-ABA-700	CX-ABA-900	CX-ABA-1100
适用原料		Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度		Film Width	100-600mm	400-800mm	600-1000mm
产品厚度		Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output	70KG	85KG	100KG
	LDPE	Max Extrusion Output	85KG	100KG	120KG
螺杆直径		Screw Diameter	45mm*2	50mm*2	55mm*2
螺杆长径比		Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱		Gear Box	146*2	146*2	173*2
主机功率		Main Motor	15KW*2	15KW*2	18.5KW*2
风机功率		Air Blower	4KW	5.5KW	7.5KW
总功率		Total Power	50KW	55KW	65KW
模口大小	HDPE	Die Head	60mm	80mm	100mm
	LDPE	Die Head	150mm	180mm	230mm
牵引辊宽度		Roller Width	700mm	900mm	1100mm
外形尺寸/重量		Dimension/Weight	5*3.5*5.2m/4T	5*4*5.2m/4.5T	5.5*4.5*6.2m/5T

CX-500-700

单螺杆双模头吹膜机
ONE-SCREW WITH TWO DIE HEADS
FILM BLOWING MACHINE



型号			MODEL	CX-50-500	CX-60-700
适用原料			Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度			Film Width	100-400mm	300-600mm
产品厚度			Film Thickness	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output		35KG*2	45KG*2
	LDPE	Max Extrusion Output		45KG*2	55KG*2
螺杆直径			Screw Diameter	50mm	60mm
螺杆长径比			Screw L/D	32:1	32:1
齿轮箱			Gear Box	173	200
主机功率			Main Motor	18.5KW	30KW
风机功率			Air Blower	4KW	5.5KW
总功率			Total Power	30KW	50KW
模口大小	HDPE	Die Head		40mm	60mm
	LDPE	Die Head		100mm	150mm
牵引辊宽度			Roller Width	500mm	700mm
外形尺寸/重量			Dimension/Weight	5.2*4.5*5.2m/4.5T	5.5*5*5.2m/5.5T

CX-1300-2100

高速高低压吹膜机 (EMS)
HDPE/LDPE HIGH SPEED AUTOMATIC
FILM BLOWING MACHINE (WITH EMS)



型号			MODEL	CX-65-1300	CX-75-1600	CX-90-2100
适用原料			Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度			Film Width	800-1200mm	1000-1500mm	1500-1900mm
产品厚度			Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output		100KG	120KG	150KG
	LDPE	Max Extrusion Output		150KG	180KG	200KG
螺杆直径			Screw Diameter	65mm	75mm	90mm
螺杆长径比			Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱			Gear Box	200	200	225
主机功率			Main Motor	30KW	37KW	55KW
风机功率			Air Blower	5.5KW	7.5KW	11KW
总功率			Total Power	55KW	65KW	100KW
模口大小	HDPE	Die Head		120mm	180mm	220mm
	LDPE	Die Head		280mm	350mm	500mm
牵引辊宽度			Roller Width	1300mm	1600mm	2100mm
外形尺寸/重量			Dimension/Weight	6*3.5*6.8m/5.5T	6*4*7.2m/6.5T	7*4.5*9.5m/8.5T

CX-700-1100

高低压吹膜机
HDPE/LDPE FILM BLOWING MACHINE



型号		MODEL	CX-50-700	CX-55-900	CX-60-1100
适用原料		Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度		Film Width	100-600mm	400-800mm	500-1000mm
产品厚度		Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
最大挤出量	HDPE	Max Extrusion Output	60KG	80KG	100KG
	LDPE	Max Extrusion Output	80KG	100KG	120KG
螺杆直径		Screw Diameter	50mm	55mm	60mm
螺杆长径比		Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱		Gear Box	146	173	180
主机功率		Main Motor	15KW	18.5KW	22KW
风机功率		Air Blower	4KW	4KW	5.5KW
总功率		Total Power	25KW	30KW	45KW
模口大小	HDPE	Die Head	60mm	80mm	100mm
	LDPE	Die Head	150mm	180mm	230mm
牵引辊宽度		Roller Width	700mm	900mm	1100mm
外形尺寸/重量		Dimension/Weight	6*3*5.2m/3.5T	6*3*5.2m/4T	6*3.5*6.2m/4.5T

CX-700-1100

印刷连体吹膜机
HDPE/LDPE FILM BLOWING MACHINE
WITH ONLINE PRINTING



型号		MODEL	CX-50-700	CX-55-900	CX-60-1100
适用原料		Suitable Materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
产品宽度		Film Width	100-600mm	400-800mm	500-1000mm
产品厚度		Film Thickness	0.006-0.10mm	0.006-0.10mm	0.006-0.10mm
印刷宽度		Max.Printing Width	560mm	760mm	960mm
印刷长度		Printing Length	250-700mm	250-700mm	250-700mm
套印精度		Registering Accuracy	横向±0.2mm 纵向±0.2mm	横向±0.2mm 纵向±0.2mm	横向±0.2mm 纵向±0.2mm
最大挤出量	HDPE	Max Extrusion Output	60KG	80KG	100KG
	LDPE	Max Extrusion Output	80KG	100KG	120KG
螺杆直径		Screw Diameter	50mm	55mm	60mm
螺杆长径比		Screw L/D	30:1/32:1	30:1/32:1	30:1/32:1
齿轮箱		Gear Box	146	173	180
主机功率		Main Motor	15KW	18.5KW	22KW
风机功率		Air Blower	4KW	4KW	5.5KW
总功率		Total Power	18KW	23KW	28KW
模口大小	HDPE	Die Head	60mm	80mm	100mm
	LDPE	Die Head	150mm	180mm	230mm
牵引辊宽度		Roller Width	700mm	900mm	1100mm
外形尺寸/重量		Dimension/Weight	6*3*5.2m/3.5T	6*3*5.2m/4T	6*3.5*6.2m/4.5T

CX-TB-500-600X2

全自动双道高速保压背心袋制袋机
FULLY AUTOMATIC DOUBLE LINES HIGH SPEED
PRESSURE HOLDING T-SHIRT BAG MAKING MACHINE




型号	MODEL	CX-TB-500*2	CX-TB-600*2
适用原料	Suitable materials	HDPE, LDPE, PBAT+PLA	HDPE, LDPE, PBAT+PLA
最大制袋宽度	Max.Bag Width	430mm*2	520mm*2
制袋长度	Produce Length	300-700mm	300-700mm
制袋速度	Bag Making Speed	120-300pcs/min	120-250pcs/min
薄膜厚度	Film Thickness	0.02-0.3mm/4 layers	0.02-0.3mm/4 layers
总功率	Total Power	13KW	15KW
放料卷最大直径	Max.Unwind Film Roll Dia.	700mm*2	700mm*2
外形尺寸/重量	Dimension/Weight	6.8*1.75*1.9m/2T	6.8*1.85*1.9m/2.2T




CX-TB-800

全自动单道背心袋制袋机带热熔边和插边装置
FULLY AUTOMATIC SINGLE LINE HIGH SPEED T-SHIRT
BAG MAKING MACHINE WITH HOT SLITTING AND GUSSETING UNIT

型号	MODEL	CX-TB-800
最大制袋宽度	Max.Bag Width	700mm
制袋长度	Produce Length	450-850mm
制袋速度	Bag Making Speed	250pcs/min
薄膜厚度	Film Thickness	0.01-0.04mm
总功率	Total Power	7KW
放料最大直径	Max.Unwind Film Roll Dia.	850mm
放料最大宽度	Max.Unwind Film Width	1000mm
外形尺寸/重量	Dimension/Weight	9.4*1.75*2.3m/2.5T



插边装置
Gusset Unit

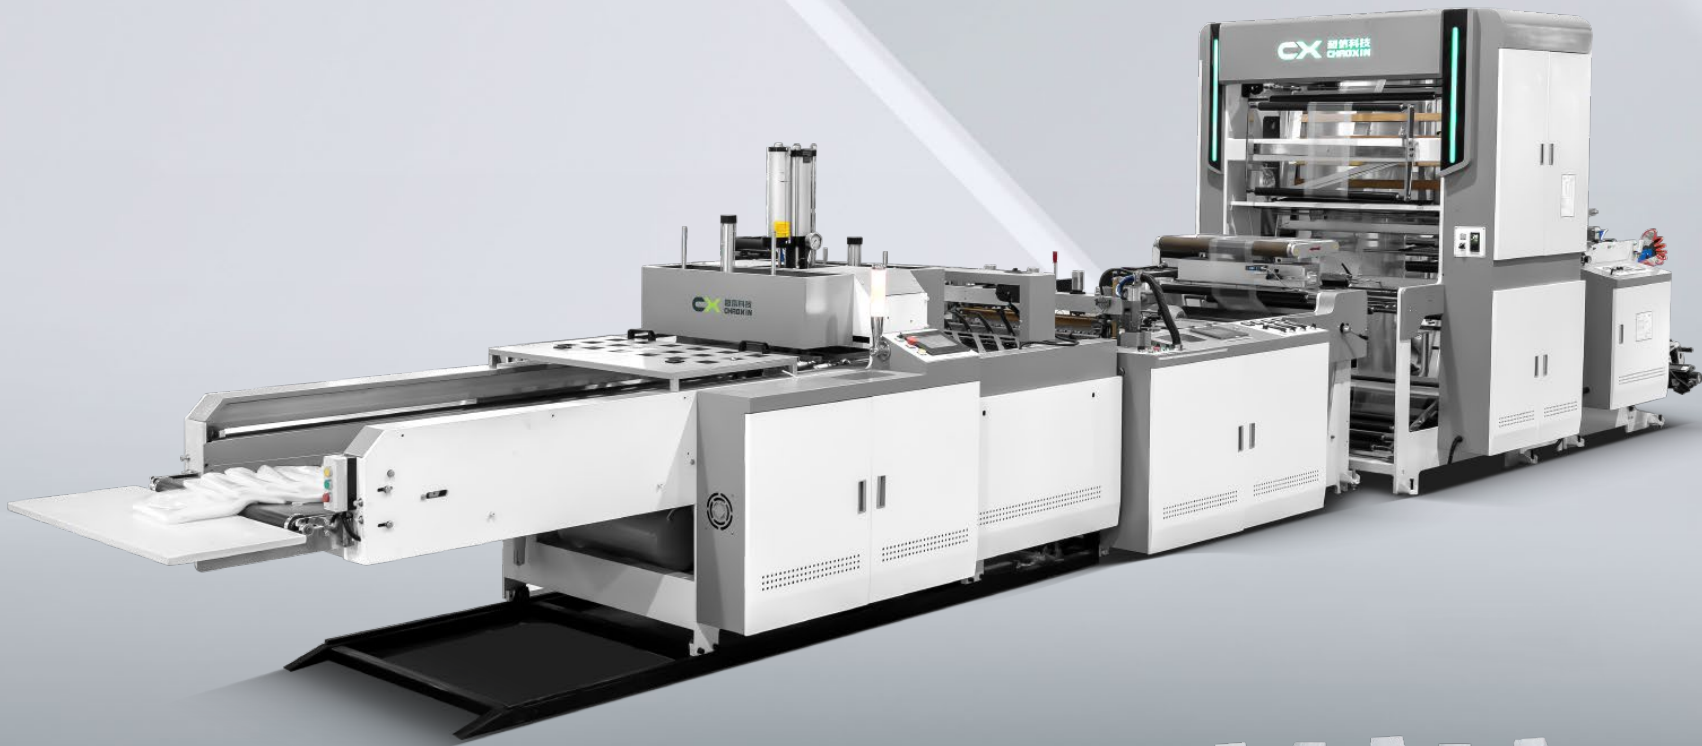

CX-TB-320*6

全自动双层六线热封冷切背心袋制袋机
FULLY AUTOMATIC DOUBLE LAYER SIX LINES
HOT SEALING COLD CUTTING T-SHIRT BAG MAKING MACHINE

型号	MODEL	CX-TB-320*6
最大制袋宽度	Max.Bag Width	320mm
制袋长度	Produce Length	250-600mm
制袋速度	Bag Making Speed	100*6 pcs/min
薄膜厚度	Film Thickness	0.01-0.04mm
总功率	Total Power	10KW
外形尺寸/重量	Dimension/Weight	7.5*1.8*2m/2.5T



CX-FB-1100-1700


高速平口袋制袋机（飞刀系统）
HIGH SPEED BOTTOM SEALING
FLAT BAG MAKING MACHINE
(FLYING KNIFE SYSTEM)



型号	MODEL	CX-FB-1100	CX-FB-1400	CX-FB-1700
适用原料	Suitable materials	HDPE, LDPE	HDPE, LDPE	HDPE, LDPE
最大制袋宽度	Max.Bag Width	1000mm	1300mm	1600mm
制袋长度	Produce Length	200-3000mm	200-3000mm	200-3000mm
机械速度	Mechanical Speed	80pcs/min	80pcs/min	70pcs/min
线速度	Line Speed	80m/min	80m/min	70m/min
薄膜厚度	Film Thickness	0.03-0.6mm	0.03-0.6mm	0.03-0.6mm
总功率	Total Power	7.5KW	9KW	11KW
外形尺寸/重量	Dimension/Weight	5*1.72*1.3m/1.2T	5*2*1.3m/1.5T	5*2.32*1.3m/1.9T

CX-FB-800-1200

电脑热封冷切制袋机
HOT SEALING COLD CUTTING
BAG MAKING MACHINE

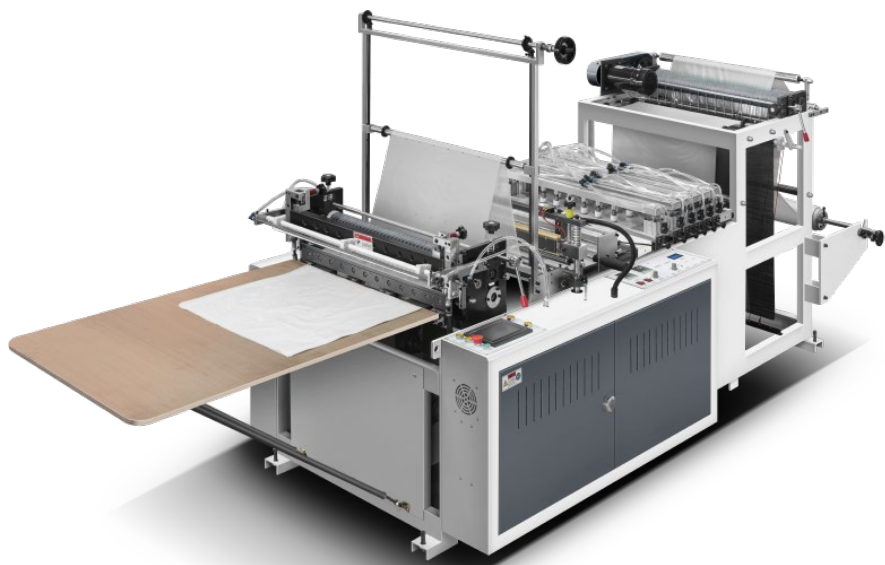

型号	MODEL	CX-FB-800	CX-FB-1000	CX-FB-1200
适用原料	Suitable materials	HDPE, LDPE	HDPE, LDPE	HDPE, LDPE
最大制袋宽度	Max.Bag Width	750mm	950mm	1150mm
制袋长度	Produce Length	100-1800mm	100-1800mm	100-1800mm
制袋速度	Bag Making Speed	20-120pcs/min	20-120pcs/min	20-120pcs/min
薄膜厚度	Film Thickness	0.01-0.10mm/layer	0.01-0.10mm/layer	0.01-0.10mm/layer
总功率	Total Power	7KW	8KW	9KW
外形尺寸/重量	Dimension/Weight	2.8*1.4*1.7m/1T	2.8*1.6*1.7m/1.1T	2.8*1.8*1.7m/1.2T

CX-FB-800-1200

无拉伸热封冷切制袋机
NON-STRETCH HOT SEALING COLD
CUTTING BAG MAKING MACHINE



型号	MODEL	CX-FB-800	CX-FB-1000	CX-FB-1200
适用原料	Suitable materials	HDPE, LDPE	HDPE, LDPE	HDPE, LDPE
最大制袋宽度	Max.Bag Width	750mm	950mm	1150mm
制袋长度	Produce Length	100-3000mm	100-3000mm	100-3000mm
制袋速度	Bag Making Speed	20-120pcs/min	20-120pcs/min	20-120pcs/min
薄膜厚度	Film Thickness	0.01-0.20mm/layer	0.01-0.20mm/layer	0.01-0.20mm/layer
总功率	Total Power	9KW	11KW	13KW
外形尺寸/重量	Dimension/Weight	4.1*1.4*1.7m/1.3T	4.1*1.6*1.7m/1.4T	4.1*1.8*1.7m/1.5T



CX-FB-350-450*4

双层四线平口袋制袋机
DOUBLE LAYER FOUR LINES HOT
SEALING COLD CUTTING FLAT
BAG MAKING MACHINE

型号	MODEL	CX-FB-350*4	CX-FB-450*4
适用原料	Suitable materials	HDPE, LDPE	HDPE, LDPE
最大制袋宽度	Max.Bag Width	50-350mm	50-450mm
制袋长度	Produce Length	100-1800mm	100-1800mm
制袋速度	Bag Making Speed	30-150pcs/min	30-120pcs/min
薄膜厚度	Film Thickness	0.01-0.10mm/layer	0.01-0.10mm/layer
总功率	Total Power	12KW	15KW
外形尺寸/重量	Dimension/Weight	2.8*1.4*2m/1.2T	2.8*1.6*2m/1.4T

CX-RB-400-500*2

双通道自动换卷背心/平口连卷袋制袋机（有芯）
AUTOMATIC DOUBLE LINES T-SHIRT/FLAT ROLLING
BAG MAKING MACHINE(WITH CORE)



型号	MODEL	CX-RB-400*2	CX-RB-500*2
最大制袋宽度	Max.Bag Width	80-300mm	100-400mm
制袋长度	Produce Length	100-500mm	100-500mm
制袋速度	Bag Making Speed	Flat Vegetable Bag: 60-230pcs*2/min	
		T-Shirt Vegetable Bag: 40-190pcs*2/min	
薄膜厚度	Film Thickness	0.01-0.10mm	0.01-0.10mm
总功率	Total Power	18KW	18KW
外形尺寸/重量	Dimension/Weight	6.2*2.2*1.9m/3T	6.2*2.4*1.9m/3.2T

CX-RGB-1000-1200

先烫后折连卷垃圾袋制袋机
C-FOLDING ROLLING GARBAGE
BAG MAKING MACHINE



型号	MODEL	CX-RGB-1000	CX-RGB-1200
适用原料	Suitable materials	PE	PE
最大制袋宽度	Max.Bag Width	900mm	1100mm
制袋长度	Produce Length	1500mm	1500mm
制袋速度	Bag Making Speed	60-140pcs/min	40-120pcs/min
薄膜厚度	Film Thickness	0.008-0.05mm	0.008-0.05mm
总功率	Total Power	14KW	16KW
外形尺寸/重量	Dimension/Weight	6.5*2*1.9m/3T	6.5*2.2*1.9m/3.5T



CX-GB-400*2


全自动双通道高速八折连卷制袋机
AUTOMATIC DOUBLE LINES HIGH
SPEED STAR SEALING ROLLING
BAG MAKING MACHINE

型号	MODEL	CX-GB-400*2
适用原料	Suitable Materials	PE, PBAT
最大制袋宽度	Max.Bag Width	80-300mm(finished product width)
制袋长度	Produce Length	500-1500mm
制袋速度	Bag Making Speed	60-220pcs/min
薄膜厚度	Film Thickness	0.006-0.025mm
总功率	Total Power	18KW
外形尺寸/重量	Dimension/Weight	5.8*1.9*1.8m/4T



边封（快递袋）制袋机

SIDE SEALING（COURIER BAG）
BAG MAKING MACHINE

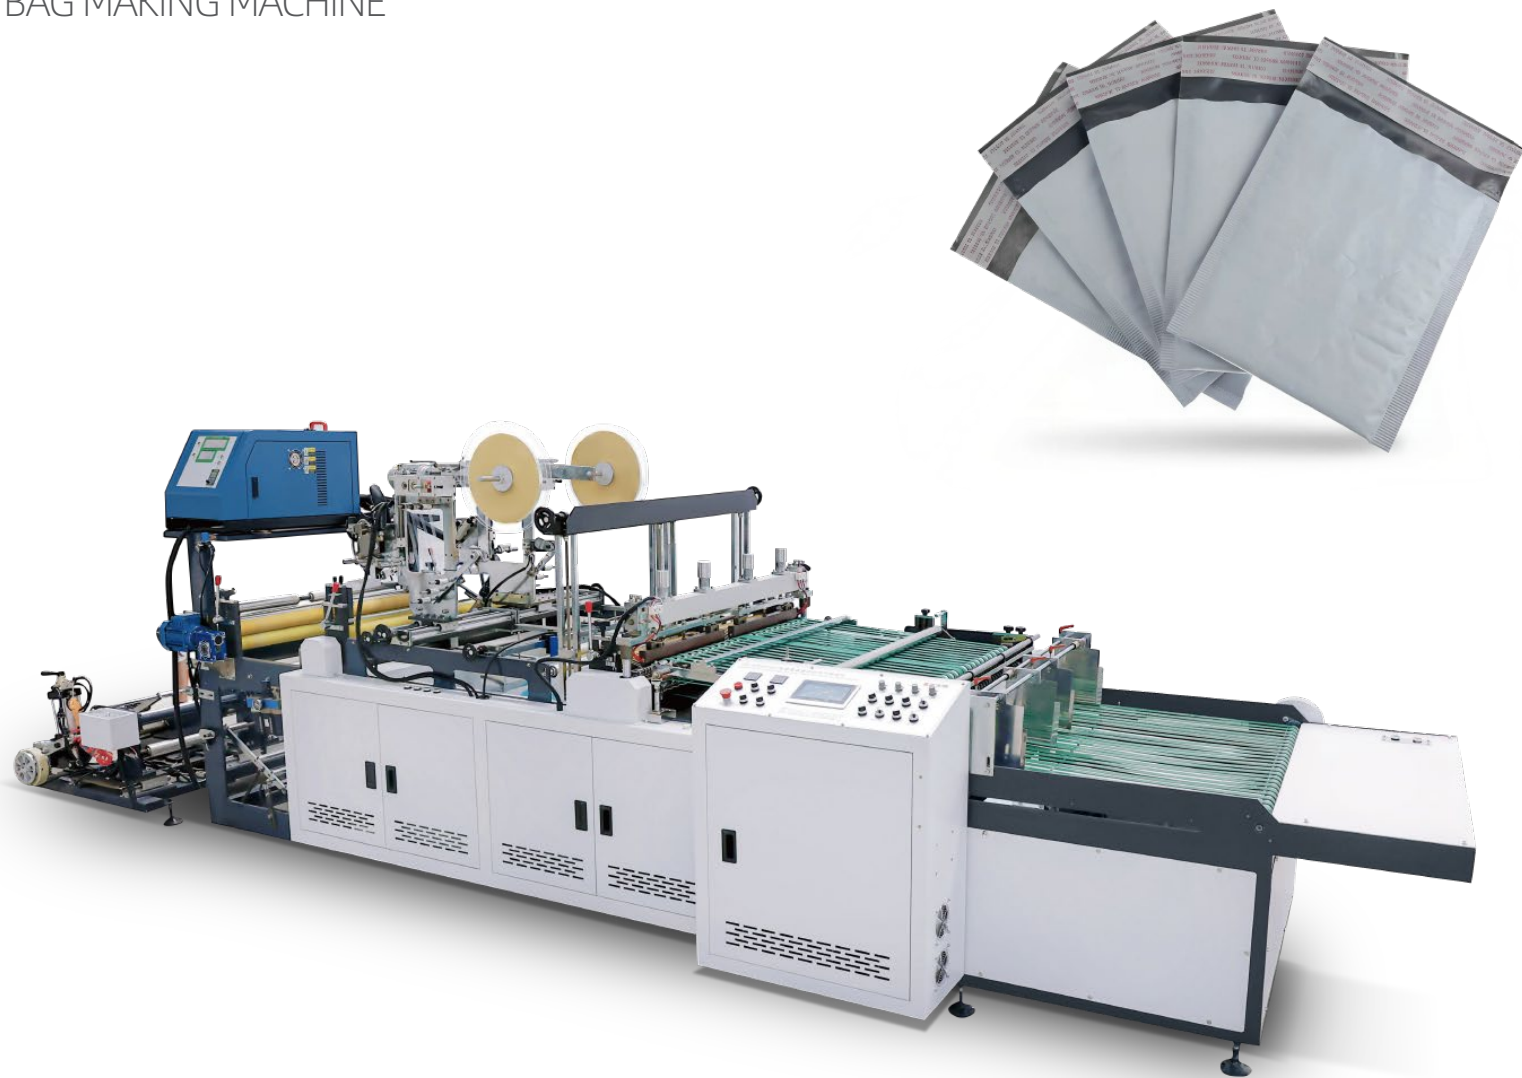

型号	MODEL	CX-SB-800	CX-SB-500*2
适用原料	Suitable materials	PE, PBAT	PE, PBAT
最大制袋宽度	Max.Bag Width	700mm	420mm
制袋长度	Produce Length	850mm	600mm
制袋速度	Bag Making Speed	200pcs/min	200*2pcs/min
薄膜厚度	Film Thickness	0.008-0.05mm	0.008-0.05mm
总功率	Total Power	14KW	18KW
外形尺寸/重量	Dimension/Weight	5.8*1.1*1.8m/1.5T	6.5*1.3*1.8m/2T

宠物袋制袋机

PET BAG MAKING MACHINE
(WITH CORE)



型号	MODEL	CX-260
适用原料	Suitable Materials	PE, PBAT
最大制袋宽度	Max.Bag Width	<235mm
制袋长度	Produce Length	250-450mm
制袋速度	Bag Making Speed	150-180pcs/min
薄膜厚度	Film Thickness	0.008-0.03mm
总功率	Total Power	6KW
外形尺寸/重量	Dimension/Weight	5.8*1.4*1.5m/1.5T



型号			MODEL	CX-GB-1000	CX-GB-1200
适用原料			Suitable materials	PE	PE
最大制袋宽度			Max.Bag Width	500-850mm	500-1000mm
制袋长度			Produce Length	400-880mm	400-1050mm
制袋速度			Bag Making Speed	40-140pcs/min	30-100pcs/min
薄膜厚度	HDPE		Film Thickness	0.007-0.04mm	0.007-0.04mm
	LDPE		Film Thickness	0.02-0.05mm	0.02-0.05mm
总功率			Total Power	15KW	24KW
外形尺寸/重量			Dimension/Weight	7*2*2.2m/3.4T	7*2*2.6m/3.8T

CX-GB-1000-1200

全自动穿绳垃圾袋制袋机
FULLY AUTOMATIC DRAWSTRING
GARBAGE BAG MAKING MACHINE



电脑凹版印刷机

GRAVURE PRINTING MACHINE



型号	MODEL	CX-GP-800(6 Colors)	CX-GP-1000(8 Colors)
印刷周长	Printing Circumference	300-1000mm	300-1000mm
套印精度	Registration Accuracy	横向±0.1mm 纵向±0.1mm	横向±0.1mm 纵向±0.1mm
印刷宽度	Printing Width	800mm	1000mm
最大过料宽度	Max.Feeding Width	850mm	1050mm
印刷速度	Printing Speed	50-200m/min	50-200m/min
总功率	Total Power	170KW	220KW
外形尺寸/重量	Dimension/Weight	12*2.7*3.5m/16T	16*3.3*3.5m/22T

柔版印刷机

HIGH SPEED FLEXO
PRINTING MACHINE



型号	MODEL	CX-FP-41000	CX-FP-61200
印刷周长	Printing Circumference	350-1000mm	350-1000mm
套印精度	Registration Accuracy	横向±0.2mm 纵向±0.2mm	横向±0.2mm 纵向±0.2mm
印刷宽度	Printing Width	960mm	1160mm
最大过料宽度	Max.Feeding Width	1030mm	1230mm
最大印刷速度	Max.Printing Speed	40-150m/min	40-150m/min
总功率	Total Power	40KW	45KW
外形尺寸/重量	Dimension/Weight	5.8*2.2*2.8m/5T	5.8*2.4*3.6m/7T

CX-25

实验型吹膜机

LABORATORY FILM BLOWING MACHINE

型号	MODEL	CX-25
适用原料	Suitable Materials	HDPE, LDPE, PBAT
产品宽度	Film Width	100-220mm
产品厚度	Film Thickness	0.006-0.10mm
最大挤出量	Max Extrusion Output	5-10KG/H
螺杆直径	Screw Diameter	25mm
主机功率	Main Motor	1.5KW
风机功率	Air Blower	0.25KW
总功率	Total Power	8KW
模口大小	Die Head	100mm
牵引辊宽度	Roller Width	250mm
外形尺寸/重量	Dimension/Weight	1.8*0.5*1.95m/280KG




CX-100-120

水环造粒机


WATER RING PELLETIZING
MACHINE

型号	MODEL	CX-100	CX-120
适用原料	Suitable materials	HDPE, LDPE, LLDPE	HDPE, LDPE, LLDPE
最大回料厚度	Max.Film Thickness	0.50mm	0.50mm
最大挤出量	Max Extrusion output	100-120KG/H	120-150KG/H
螺杆直径	Screw diameter	100mm	120mm
螺杆长度	Screw Length	2200mm	2640mm
齿轮箱	Gearbox	173	200
主机功率	Main motor	30KW	37KW
外形尺寸/重量	Dimension/Weight	9.5*5*2.8m/3.5T	10*5*2.8m/4T

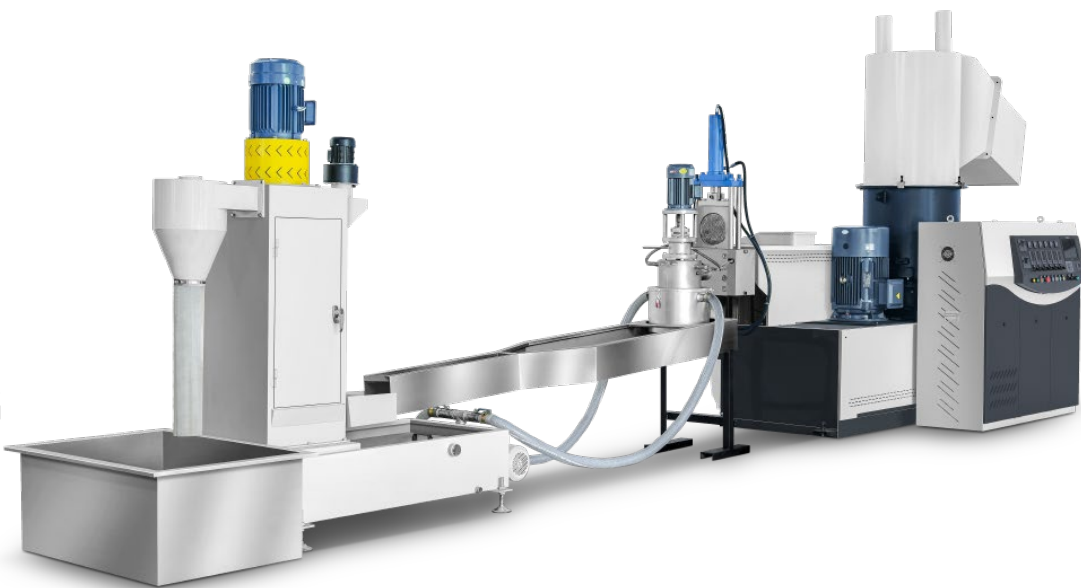

选配设备
OPTIONAL DEVICES

上旋转
Oscillating Tower



自动测厚（横向扫描）
Automatic Thickness Gauge
(Horizontal Scan)



自动测厚(环形扫描)
Automatic Thickness Gauge
(Circular Scan)



自动风环
Automatic Air Ring



旋转三风口风环
Rotary Triple Vent Air Ring




内冷模头
IBC Die Head



三层圆模剖面
Cross-section of Three
Layers Round Die Head



五层圆模剖面
Cross-section of Five
Layers Round Die Head



多组份喂料系统
Multi-component
Dosing System



六组份喂料系统
Six-component Dosing System




三组份喂料系统
Triple Components
Lost-in-weight Feeder



单组份喂料系统
Single Component
Lost-in-weight Feeder



液压换网
Hydraulic Screen Changer




快速手动换网
Quick Manual Screen Changer



电动稳泡圈
Electric Bubble Stabilizer




电晕机
Corona Treatment

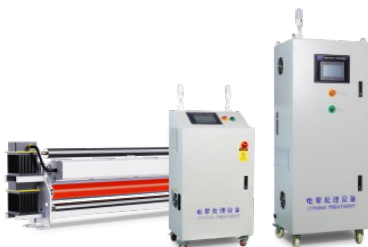

三合一收卷
Three-in-one Winder



排棍式双收卷（PLC）
Row Roller Type
Double Winder(PLC)




中心收卷
Central Type Winder



摩擦自动双收卷（PLC）
Automatic Double
Winder(PLC)



下吹模头
Down-Blow Die Head



米克重
Meter Weight Control



自动吸料
Auto Loader



普通手动换网
Manual Screen Changer



自动测宽
Automatic Width Control



纠偏系统
EPC System




干燥机
Dryer



热割刀
Hot Slitting Knife



压力传感器
Screw Pressure Sensor

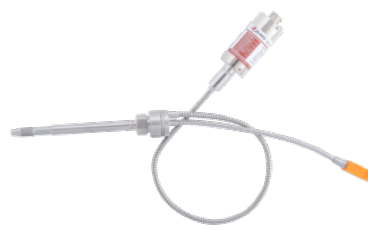

二次插边
Secondary Side
Gusset Device



边料在线回收
Side Waste Online Recycling



螺杆式空压机
Screw Type Air Compressor



表冷器+冷水机
Heat Exchange + Chiller



自动拌料机
Automatic Mixer



拌料机带烘干
Mixer with Dryer



拉力测试仪
Tensile Tester



恒温恒湿试验箱
Constant Temperature and
Humidity Test Chamber



紫外线加速耐候试验机
UV Accelerated
Weathering Tester



直读式密度测试仪
Direct-reading Density Tester



熔融指数仪
Melt Flow Indexer





我们的精神

高效、突破、双赢

OUR SPIRIT

Efficiency, Breakthrough, Win-win